
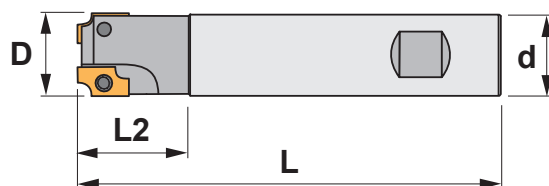


# CANELA

## SET ADMT

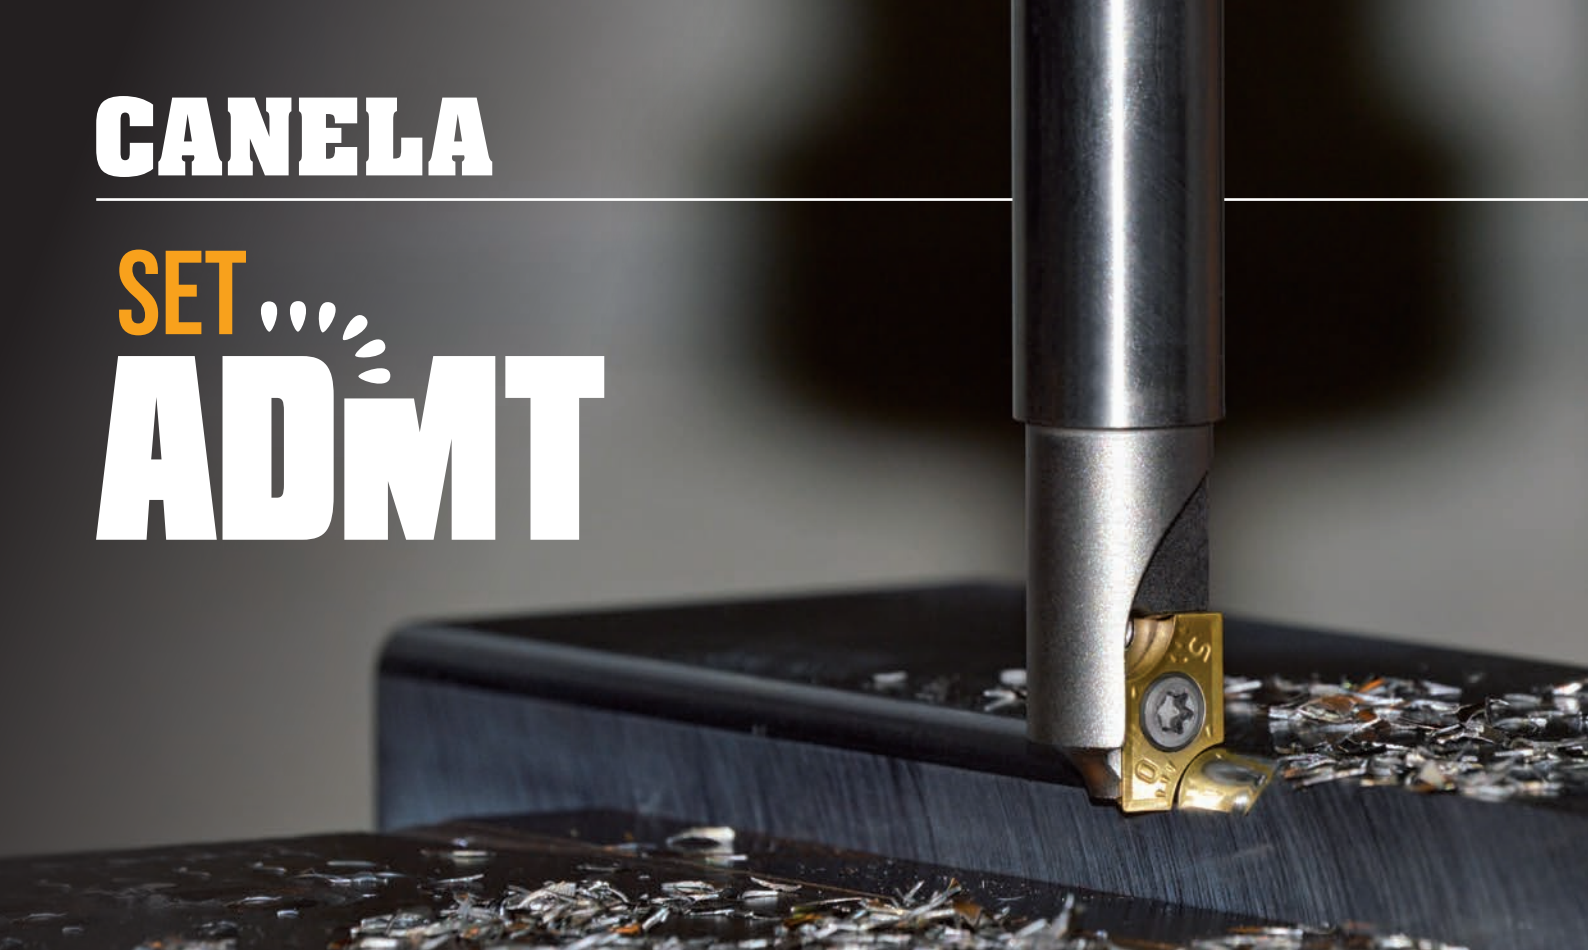

### 1235.07



2 frese a 2 denti con raggio concavo + 18 inserti

| Riferimento   |   | d  | D  | L   | L2 | rmin | rmax | Dimensioni inserto  |
|---------------|---|----|----|-----|----|------|------|---------------------|
| 1235.07.02201 | 2 | 20 | 22 | 120 | 35 | 1,0  | 2,5  | ADMT 1503R1.0 / 2.5 |
| 1235.07.02203 | 2 | 20 | 22 | 120 | 35 | 3,0  | 5,0  | ADMT 1503R3.0 / 5.0 |

### ADMT-R

Inserti con angolo di spoglia 15°

| Riferimento   | l     | r   | s    | d    |
|---------------|-------|-----|------|------|
| ADMT 1503R1.0 | 15,00 | 1.0 | 3,18 | 9,52 |
| ADMT 1503R1.5 | 15,00 | 1.5 | 3,18 | 9,52 |
| ADMT 1503R2.0 | 15,00 | 2.0 | 3,18 | 9,52 |
| ADMT 1503R2.5 | 15,00 | 2.5 | 3,18 | 9,52 |
| ADMT 1503R3.0 | 15,00 | 3.0 | 3,18 | 9,52 |
| ADMT 1503R3.5 | 15,00 | 3.5 | 3,18 | 9,52 |
| ADMT 1503R4.0 | 15,00 | 4.0 | 3,18 | 9,52 |
| ADMT 1503R4.5 | 15,00 | 4.5 | 3,18 | 9,52 |
| ADMT 1503R5.0 | 15,00 | 5.0 | 3,18 | 9,52 |

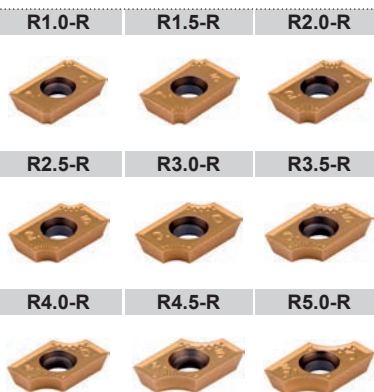

### TIN25

Composizione rivestimento



### TiN-TiC-TiN

Grado rivestito in CVD con TiN-TiC-TiN. Lo spessore del rivestimento è di 3-5 micron, da utilizzare su acciaio, acciaio legato e acciaio inossidabile, con o senza refrigerazione.

Eines CANELA, S.L.

Pol. Ind. "Les Guixeres" · Torrent de Vallmajor 88 · 08915 Badalona · Catalunya · Espanya

Tel. +34. 93 399 85 61 · www.canelatools.com