
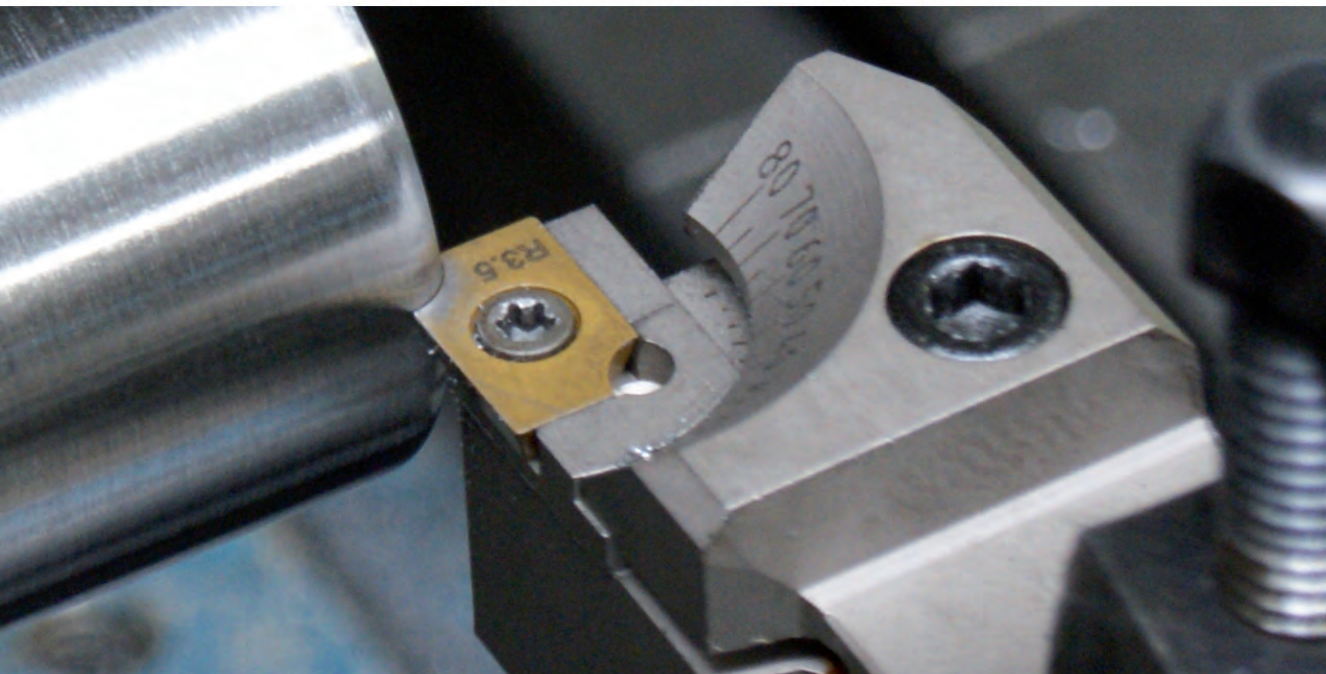


CANELA MULTITURN

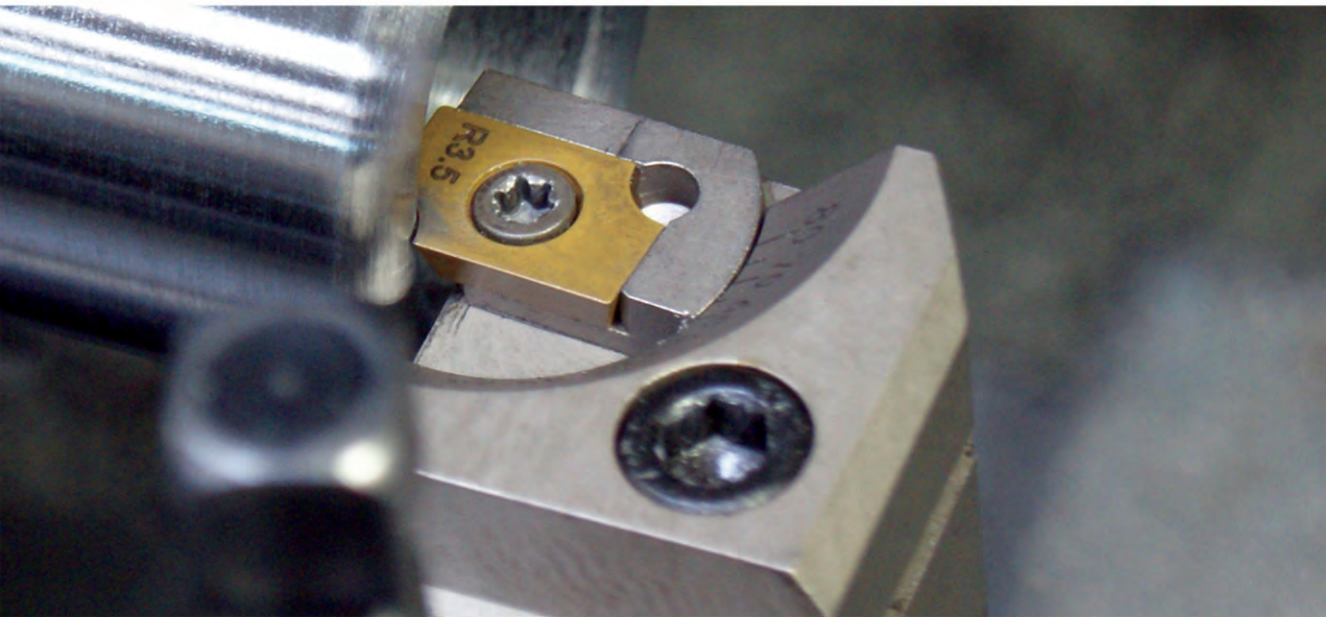

EINES CANELA, S.A
Pol. Ind. "Les Guixeres"
Torrent de Vallmajor, 88
08915 Badalona (Spain)
Tel.: +34.93 399 85 61
Fax: +34 383 40 00
canela@canelatools.com
www.canelatools.com

80 70 60 50 40 30 20 10

```
if(num % 1 == 0)
return false;
else
return true;
}

bool isPrime(int num)
{
if(num == 1) return false;
else
return true;
}



for(int i = 2; i < num; i++)
{
if(num % i == 0)
return false;
else
return true;
}

return true;
}

int main()
{
int num;
cout << "Enter a number: ";
cin >> num;
if(isPrime(num))
cout << "The number is prime." << endl;
else
cout << "The number is not prime." << endl;
return 0;
}


string filename;
cout << "Specify the file name: ";
cin >> filename;
ifstream infile(filename);
if(!infile.is_open())
{
cout << "The file does not exist." << endl;
return -1;
}
else
{
cout << "The file exists." << endl;
return 0;
}
}

#include <iostream>
#include <fstream>
#include <string>
```

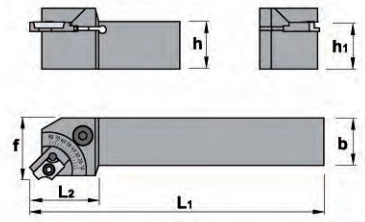
SET STXCR 20

Ref.	STXCR 2020K16	h=h1	b	L1	L2	f
		20	20	125	27	25





ADMW-R		r	s	d
Ref.	ADMW 1503R1.0	1.0	3,18	9,52
	ADMW 1503R1.5	1.5	3,18	9,52
	ADMW 1503R2.0	2.0	3,18	9,52
	ADMW 1503R2.5	2.5	3,18	9,52
	ADMW 1503R3.0	3.0	3,18	9,52
	ADMW 1503R3.5	3.5	3,18	9,52
	ADMW 1503R4.0	4.0	3,18	9,52
	ADMW 1503R4.5	4.5	3,18	9,52
	ADMW 1503R5.0	5.0	3,18	9,52

Positive 15° clearance - Rectangular inserts.




TCMT		l	s	d
Ref.	TCMT 16T308-03TIN16	16,50	3,97	9,52

Positive 7° clearance - Triangular inserts.

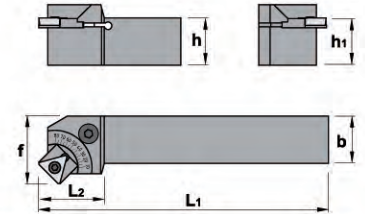


SET STXCR 25

Ref.	STXCR 2525M16	h=h1	b	L1	L2	f
		25	25	150	27	32



ADMW-R		r	s	d
Ref.	ADMW 1503R1.0	1.0	3,18	9,52
	ADMW 1503R1.5	1.5	3,18	9,52
	ADMW 1503R2.0	2.0	3,18	9,52
	ADMW 1503R2.5	2.5	3,18	9,52
	ADMW 1503R3.0	3.0	3,18	9,52
	ADMW 1503R3.5	3.5	3,18	9,52
	ADMW 1503R4.0	4.0	3,18	9,52
	ADMW 1503R4.5	4.5	3,18	9,52
	ADMW 1503R5.0	5.0	3,18	9,52

Positive 15° clearance - Rectangular inserts.



TCMT		l	s	d
Ref.	TCMT 16T308-03TIN16	16,50	3,97	9,52

Positive 7° clearance - Triangular inserts.

