


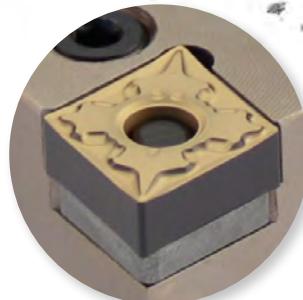

INSERTS


Geometries	A02-07
Grades	A08-13
Inserts selection	A14-15
Grade chart	A16
Label designation system	A17
ISO Code Key	A18-19
ISO inserts	A20-43
Technical information	A44
Ceramic inserts	A45-49
CBN/PCD inserts	A50-51

Turning *line*

-FC


Recommendation for light cutting of carbon steel, alloy steel and stainless steel.

Double sided chipbreaker.
Can be used at low depth of cuts and high feed rates.
The curved edge allows smooth chip discharge.
Recommended for workpieces in the 160-250HB range.

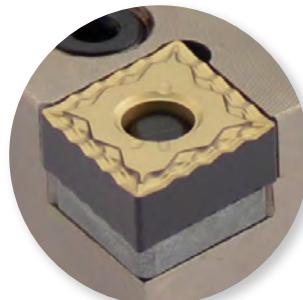-FMC

Alternative breaker for light cutting of carbon steel and alloy steel.

Double sided chipbreaker.
Superior chip control at small depth of cuts.
Covers copying and back turning with wavy edge.
Recommended for workpieces in the 200-300HB range.

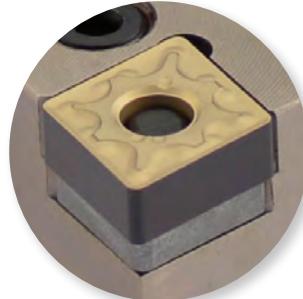-MC

Recommendation for medium cutting of carbon steel and alloy steel.
First recommendation for finish to light cutting of cast iron.


Double sided chipbreaker.
Positive land provides sharp cutting action.



Available in

TN15, TN20, TN30 and TN35


-MFC

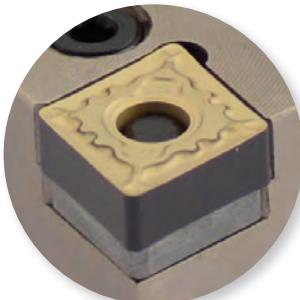

Alternative breaker for medium cutting of carbon steel and alloy steel.

Double sided chipbreaker.
Suitable for medium to light cutting.
Breaker geometry appropriate for copying and back turning.
Good balance of sharpness and strength.


-MHC

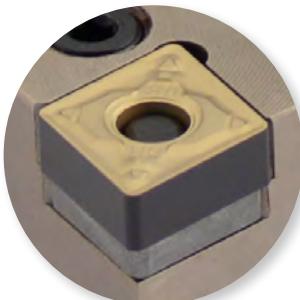

**Recommendation for medium-heavy cutting of mild steel.
Alternative breaker for medium cutting of carbon steel and alloy steel.**

Double sided chipbreaker.
Flat land offers high edge strength.
A wide chip pocket prevents chip jamming at large depth of cut.

-RC

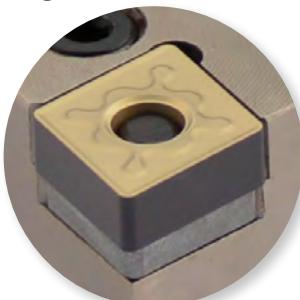

Recommendation for rough cutting of carbon steel, alloy steel and stainless steel.

Double sided chipbreaker.
For interrupted cut and removing scale.
A combination of wide land and large chip pocket allows high feeds.




Geometries

-FC



Recommendation for light cutting of carbon steel, alloy steel and stainless steel.

Double sided chipbreaker.
Can be used at low depth of cuts and high feed rates.
The curved edge allows smooth chip discharge.
Recommended for workpieces in the 160-250HB range.

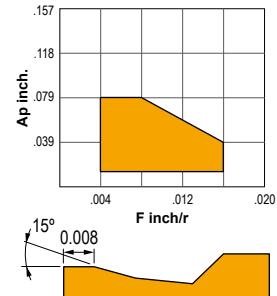


-FMC



Alternative breaker for light cutting of carbon steel and alloy steel.

Double sided chipbreaker.
Superior chip control at small depth of cuts.
Covers copying and back turning with wavy edge.
Recommended for workpieces in the 200-300HB range.

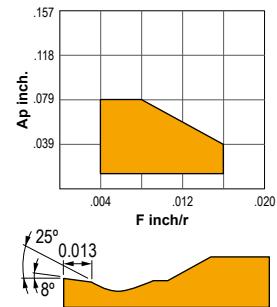


-CC



Recommendation for light cutting of mild steel.

Double sided chipbreaker.
Effectively controls chips.
Recommended for workpieces in the 200-300HB range.

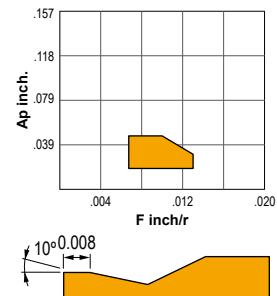


-MC



**Recommendation for medium cutting of carbon steel and alloy steel.
First recommendation for finish to light cutting of cast iron.**

Double sided chipbreaker.
Positive land provides sharp cutting action.

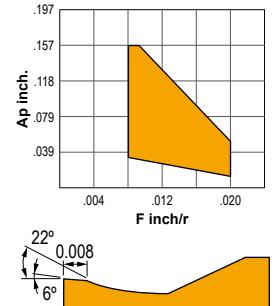




Geometries

-MFC



Alternative breaker for medium cutting of carbon steel and alloy steel.

Double sided chipbreaker.
Suitable for medium to light cutting.
Breaker geometry appropriate for copying and back turning.
Good balance of sharpness and strength.

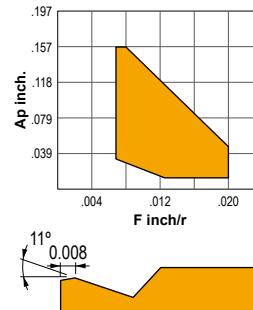


-MHC



**Recommendation for medium-heavy cutting of mild steel.
Alternative breaker for medium cutting of carbon steel and alloy steel.**

Double sided chipbreaker.
Flat land offers high edge strength.
A wide chip pocket prevents chip jamming at large depth of cut.

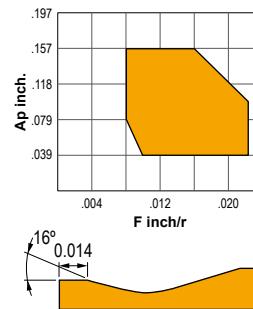


-RC



Recommendation for rough cutting of carbon steel, alloy steel and stainless steel.

Double sided chipbreaker.
For interrupted cut and removing scale.
A combination of wide land and large chip pocket allows high feeds.

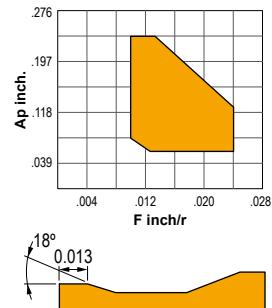


-KC



Recommendation for medium cutting of cast iron.

Optimum balance between sharpness and high edge strength for general use.

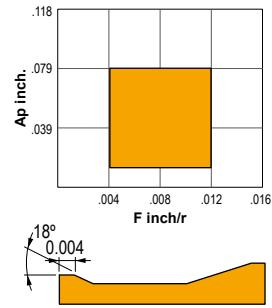




Geometries

-TC



First recommendation for medium cutting of stainless and mild steel and for light cutting of difficult-to-cut materials. Double-sided chipbreaker.
The sharp cutting edge gives best performance.

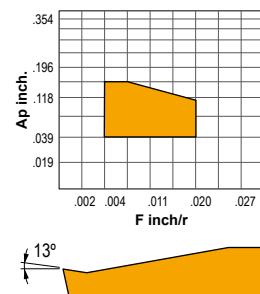


..NGP



Light cutting of difficult-to-cut materials.
Ideal for heat-resistant alloy and titanium alloy.

The curved cutting edges support changes in cutting depth-smooth chip discharge and disposal.
 The high rake angle is highly suitable for finish-light cutting difficult to cut materials.

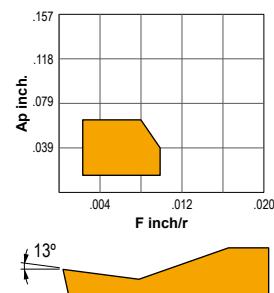


..NMA



Recommendation for rough cutting of cast iron.

Double sided flat insert.
 Most effective in unstable machining i.e. interrupted cuts due to high edge strength and stable fitting on the shim.

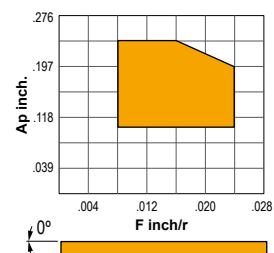


..NMM



Recommendation for heavy cutting of carbon steel and alloy steel.

Single sided chipbreaker.
 Appropriate for the medium range of the heavy cutting region.
 The flat edge and chamfer provide a balance of sharpness and strength.
 Variable land and a wavy chipbreaker for good chip control.

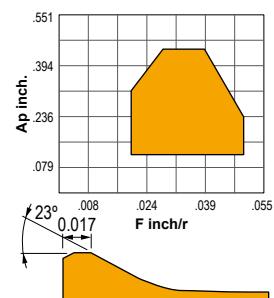


..NMX



Light cutting.

Double sided chipbreaker.
 Parallel chipbreaker.
 Excellent chip control at low to medium feed rates.

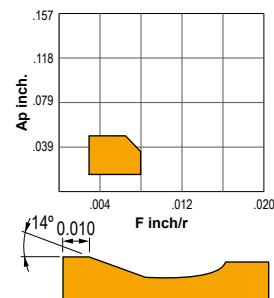





Geometries

-AL


This geometry can be used for turning aluminium, light alloys, non ferrous materials, high-melting metals, plastics, glass fiber, reinforced plastics, laminated board, carbon and fine ceramics.

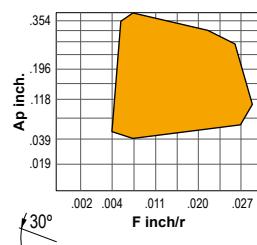

-AP


Suitable for aluminium, light alloys, non ferrous materials, high-melting metals, plastics, glass fiber, reinforced plastics, laminated board, carbon and fine ceramics.

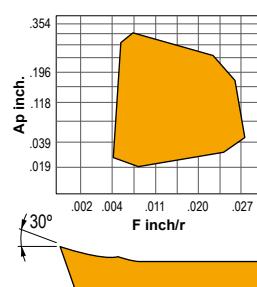
..MR


Light to medium cutting of carbon steel, alloy steel and stainless steel.


Standard, general purpose chipbreaker.

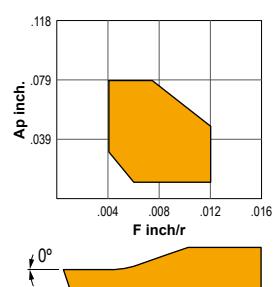
..MT


Recommendation for medium cutting of carbon and alloy steel.


The small flat land at cutting edge provides an excellent balance of wear and fracture resistance.

The wide chip gullet decreases cutting resistance, reduces vibration and chip jamming in elevated depth of cut applications.

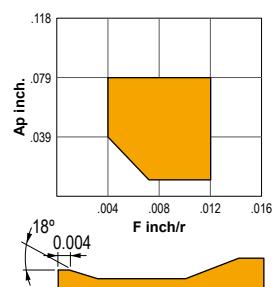

..MW


For cast iron.

Most effective in unstable machining due to high edge strength.

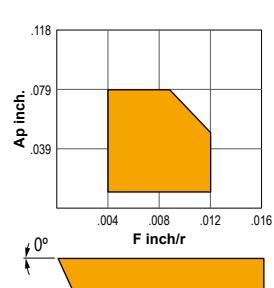

CVD

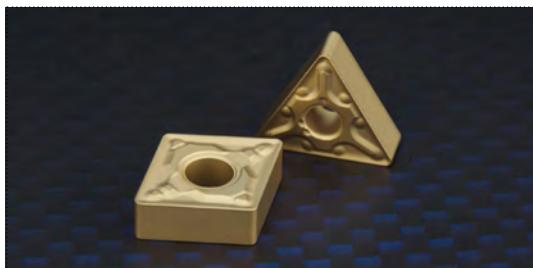

CVD coated carbide

The CVD coatings are generated by a chemical reaction at high temperatures (1292-1922 °F). All CVD coatings provide a high wear resistance due to its excellent adhesion to cemented carbide.

CVD coatings are the first choice in a large turning range where wear resistance is important.

Features of CVD coated carbide


Material		Grade	Colour	Coating composition	Definition
P Steel		TN15		TiCN+Al ₂ O ₃ +TiN	Wear resistant finishing to intermediate grade suitable for many applications on steel, cast iron, stainless steel and high temperature alloys. It is generally used at higher speeds where deformation may be a problem. The multi-layer coating includes TiCN and aluminium oxide.
		TN20		TiCN+Al ₂ O ₃ +TiN	General purpose wear resistant grade. It has an enriched substrate that has exceptionally good deformation as well as fracture resistance. The multi-layer coating includes aluminium oxide to add additional heat and wear resistance. It is used to machine steel and stainless steel at lower speeds than TN15.
		TN30		TiCN+Al ₂ O ₃ +TiN	General purpose wear resistant turning grade. The multi-layer coating includes aluminium oxide to add additional heat and wear resistance. It is used to machine steel at lower speeds than TN15. This turning grade is for demanding metal removal operations, including cutting through scale at low speeds through heavy interruption, and problem machining of stainless steel at low speed and poor rigidity.
M Stainless		TN35		TiCN+Al ₂ O ₃ +TiN	New coated grade developed to machine stainless steel and heat-resistance alloys. This grade is only used in combination with the MC chipbreaker. First choice for stainless steel applications.
K Cast iron		TK15		TiCN+Al ₂ O ₃	CVD grade for gray, ductile nodular cast iron with excellent balance of wear and fracture resistance. The smooth coating prevents insert failure such as welding and chipping, providing a consistent cutting performance.

Grade characteristics

Grade	Substrate			Coating Layer	
	Hardness (HRa)	T.R.S (GPa)	Surface	Composition	Thickness
TN15	90.3	2.0	Tough	Accumulated TiCN-Al ₂ O ₃ +Ti Compound	Thick
TN20	90.3	2.0	Tough	Accumulated TiCN-Al ₂ O ₃ +Ti Compound	Thick
TN30	90.0	2.2	Tough	Accumulated TiCN-Al ₂ O ₃ +Ti Compound	Thick
TN35	89.0	2.6	-	Ti Compound	Thin
TK15	91.0	2.2	-	TiCN-Al ₂ O ₃ Compound	Thick



PVD

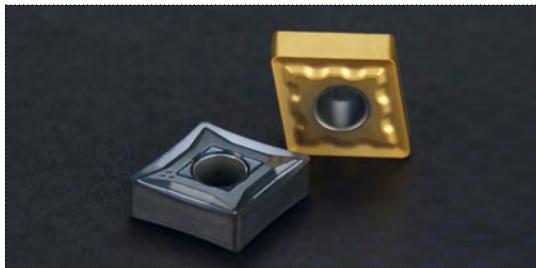

PVD coated carbide

PVD coatings offer wear resistance due to their hardness. The coating process involves the evaporation of metal, which reacts with nitrogen to form a hard nitride coating. The full process is made at relatively low temperatures (752-1112 °F). PVD coatings are recommended when sharp cutting edges are needed.

Features of PVD coated carbide

Material		Grade	Colour	Coating composition	Definition
P Steel		TL20	●	TiAlN	Carbide with TiAlN and lubricity layer PVD coating. It has a lower friction coefficient and a lower cutting energy during finishing. The sharper cutting edge reduces the built-up edge damage and gives the workpiece an excellent surface finish. Recommended for alloyed steel.
		TIN25	○	TiN-TiC-TiN	Coated with TiN-TiC-TiN. The coating has a thickness of 3-5 microns for use on steel, alloyed steel and stainless steel, with or without coolant.
M Stainless		TS15	●	TiAlN	Coated TiAlN grade in the K20 range. It is used on cast iron, aluminium and heat-resistant alloys. It works well on cobalt based alloys and synthetic materials, and is suitable for finishing on heat-resistant alloys.
S Heat resistant alloys		TS20	○	TiN+TiAlN+TiN	Coated TiN+TiAlN+TiN grade for machining super alloys. It has a fine grain of 0.8 µm and a hardness of HV30 1820 and it offers an excellent rupture and heat resistance.
N Non ferrous materials		ZR10	○	TiB ₂	Micrograin grade with an extremely hard single TiB ₂ layer for machining aluminium, copper alloys and plastics.

Grade characteristics

Grade	Substrate		Coating Layer	
	Hardness (HRa)	T.R.S (GPa)	Composition	Thickness
TL20	91.5	2.5	(Al,Ti)N	Thin
TIN25	90.5	2.0	TiN	Thin
TS15	91.5	2.5	(Al,Ti)N	Thin
TS20	90.5	2.5	(Al,Ti)N-Ti Compound	Thin
ZR10	99.2	2.8	TiB ₂	Thin

UNCOATED CARBIDE



UNCOATED CARBIDE

- Excellent thermal crack resistance makes it possible to machine in wet cutting conditions.
- Cemented carbide can be applied for various workpieces.
- High toughness and low cutting force.
- Low affinity to workpiece.

Features of UNCOATED CARBIDE

Material		Grade	Colour	Composition	Definition
P Steel		PM25		WC+TiC+TaC+Co	General purpose uncoated grade in the P30 range. This tough, economical grade is suitable to work carbon steels, alloyed steels, tool steels and stainless steels. PM25 provides toughness and resistance to deformation in roughing and semi-finishing applications.
		PM40		WC+TiC+TaC+Co	Roughing grade in the P35 range. This tough grade is for structural, cast and tool steels. It is recommended when toughness is more important than wear resistance.
K Cast iron		KM15		WC+Co	Finishing grade in the K10 range. This carbide grade is for use on cast iron, aluminium and heat-resistant alloys. This grade works well on cobalt based alloys and synthetic materials and is suitable for finishing on heat-resistant alloys.

Application


ISO	Composition	Features	Workpiece
P	WC+TiC+TaC+Co	Heat resistance, excellent plastic deformation resistance.	Carbon steel, alloy steel, stainless steel.
M	WC+TiC+TaC+Co	General tools stable heat resistance with strength.	Carbon steel, alloy steel, stainless steel, cast steel.
K	WC+Co	High strength and superior wear resistance.	Carbon iron, non-ferrous metal, plastic, etc.

Properties

Grade	Hardness (HRa)	TRS (Kgf/mm ²)	Young's modulus (10 ³ Kgf/mm ²)	Thermal expansion coefficient (10 ⁻⁶ /°C)	Thermal conductivity (cal/cm.sec.°C)
KM15	90.9	250	63	-	105
PM25	91.9	200	56	5.2	45
PM40	91.3	230	53	5.2	-



CERMET

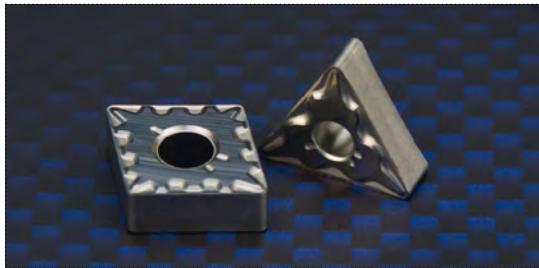


CERMET

- Maximum heat and wear resistance.
- Excellent resistance to oxidation.
- For very high cutting speeds.
- Ideal for finishing.
- Universal application.


Features of CERMET

Material		Grade	Colour	Composition	Definition
P Steel		NC25		Ti+W+Ta/Nb	NC25 is a newly developed Cermet applicable for a wide range of cutting conditions as a standard grade for general machining of steel. It can successfully be used for a range of cutting speeds from 100 to 200 m/min with better wear resistance than conventional TiC Cermet. It gives an excellent performance from semi-finish to finish operation of ductile cast iron at cutting speeds of 200 m/min. or less.


Application recommendations

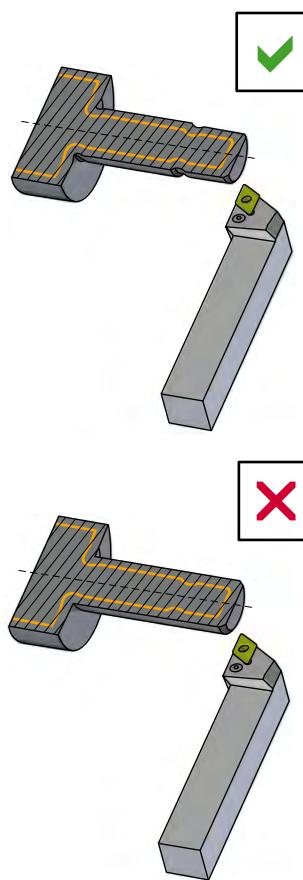

i It is required to prerough following the profile precisely.

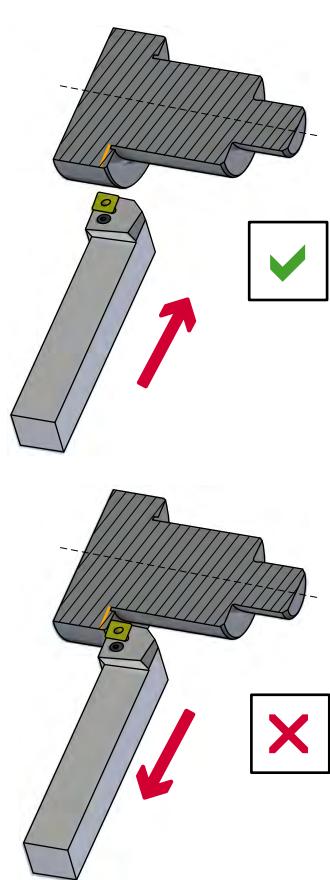

i Use conventional approach for face turning.

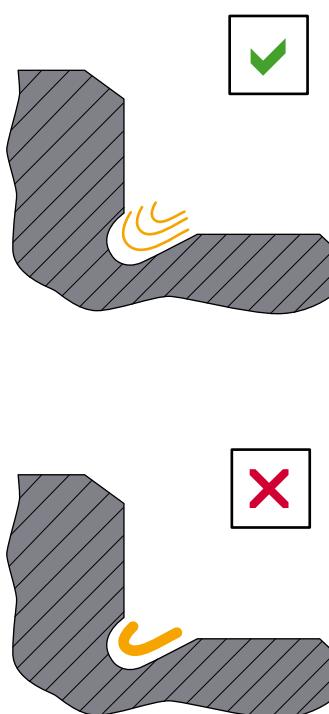

i Several cuts are required for deep applications.

CERAMIC



CERAMIC

Ceramic grades are able of running at high speeds, thus reducing expensive machining time. Ceramic inserts are recommended for hard turning of 38HRC to 64HRC hardened steel, or for roughing and finishing of cast iron.

Ceramic maintains good surface finishes due to its low affinity to workpiece materials.

Features of CERAMIC


Material		Grade	Colour	Composition	Definition
K Cast iron		CX9		Al_2O_3	CX9 is a highly wear-resistant tool that has been formed into microstructure by adding a trace amount of zirconia (ZrO_2) to highly pure alumina (Al_2O_3), the main component of this tool material.
		CC2		$\text{Al}_2\text{O}_3+\text{TiC}$	This material is well-balanced between wear resistance and fracture resistance, and it works well in a wide range of cutting cast iron and in the turning of hard materials.
S Heat resistant alloys		CX6		SiAlON	CX6 is an ultimate silicon-nitride material that has been developed to improve the notch wear of the conventional ceramics that contain silicon nitride. It reduces notch wear amount in machining gray cast iron.
P Steel		CW1		Al_2O_3 -based	CW1 is a whisker-reinforced composite ceramic material with silicon-carbide whisker added to alumina. Excellent wear resistance with high toughness and crack resistance for heat-resistant alloys and high-hardened mill rolls.
		CC7		$\text{Al}_2\text{O}_3+\text{TiC}$	Since it has the finest grain size particle with a high melting point, the composite CC7 improves both hardness and strength, and it shows superior performance as a special material for machining high-hardened materials.

Ceramic main application areas

Cast iron	Aerospace	Roll turning	Hardened materials



CBN / PCD

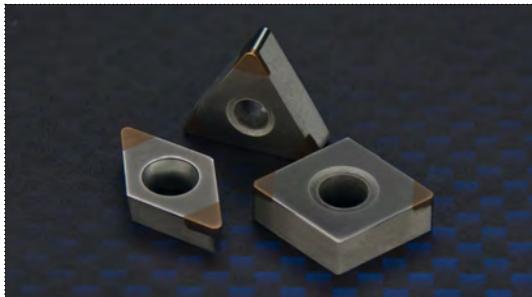

CBN

- High thermal conductivity, which provides stable cutting.
- Suitable for high speed cutting of cast iron and sintered steel.
- Superior wear resistance when cutting hardened materials.

PCD

- Applicable for turning and milling of non-ferrous materials and non-metals.
- Long tool life due to extreme hardness.
- High cutting speeds and increased cutting productivity.

Features of CBN / PCD

Material		Grade	Colour	Composition	Definition
H Hard materials		CB10		TiCN+Al ₂ O ₃ +TiN	<p>These CBN are formed with a special ceramic binder based on CBN (Cubic Boron Nitride) particles, and the CBN sintered layer increases the thickness of the carbide base.</p> <p>CBN are high-performance tool materials that have high hardness at room temperature and high temperature and are almost free from chemical reactions against the material to be cut.</p>

	Materials to be machined with polycrystalline boron nitride Material	Vc = m/min.	Infeed f = inch./U	Depth of cut ap=inch.
CBN	- Hardened materials and nitriding steels.	60-120	0.001-0.007	0.039
	- High temperature and corrosion resistant alloys with high nickel or cobalt content.	70-150	0.001-0.006	0.039
	- Gray cast iron, especially hard and abrasion resistant types.	300-600	0.004-0.020	0.118
	- High speed steel (HSS).	60-120	0.001-0.004	0.039
	- Metal powder spraying.	60-120	0.078	0.039

Material		Grade	Colour	Composition	Definition
N Non ferrous materials		PD10		TiCN+Al ₂ O ₃ +TiN	<p>PCD consists of a 0.019 inches thick diamond layer, which is inseparably connected to a carbide base.</p> <p>This polycrystalline diamond layer originates at a pressing operation by bonding of the smallest diamond grains, supported by a metallic bonding agent.</p> <p>This cutting material has also a very long tool life.</p>

	Materials to be machined with polycrystalline diamond Material	Vc = m/min.	Infeed f = inch./U	Depth of cut ap=inch.
PCD	- Aluminium alloys under 3% SIC	200-2000	0.002-0.015	up to the whole diamond cutting edge
	- Aluminium alloys up to 12% SIC	150-1000	0.002-0.015	
	- Aluminium alloys up to approx. 21% SIC	100-800	0.002-0.015	
	- Brass, magnesium, zinc alloys.	200-2000	0.002-0.015	
	- Copper, bronze, lead alloys.	200-1000	0.002-0.015	
	- Duro and thermoplastics with and without fillers e.g. epoxy resin.	100-1000	0.002-0.007	
	- Hard papers.	200-600	0.004-0.011	
	- Hard and soft rubber with and without fillers.	100-500	0.004-0.011	
	- Graphite and pre-sintered carbide.	100-500	0.004-0.015	
	- Aluminium oxide, silicon, tungsten.	50-180	0.004	



Insert selection

- Main application
- Extended application

	Machining type	Material	Continuous	Slight interruption	Interruption
- FC 	Finishing	●	TN15	TN15	TN30
	Medium	○	TN15	-	-
	Roughing	●	TN15	-	-
- FMC 	Finishing	●	TN15	TN15	-
	Medium	○	-	-	-
	Roughing	●	-	-	-
- CC 	Finishing	●	NC25	NC25	-
	Medium	●	-	-	-
	Roughing	●	NC25	-	-
- MC 	Finishing	●	TN15	TN15	TN30
	Medium	●	TN35	TN35	TN35
	Roughing	●	TN15	-	-
- MFC 	Finishing	○	●	TN15	TN15
	Medium	●	-	-	-
	Roughing	○	-	-	-
- MHC 	Finishing	●	●	TN15	TN20
	Medium	●	-	-	-
	Roughing	●	-	-	-
- RC 	Finishing	●	●	TN15	TN15
	Medium	○	○	-	TN30
	Roughing	●	●	-	-
- TC 	Finishing	●	●	TS20	TS20
	Medium	●	●	-	-
	Roughing	●	●	TS20	TS20
- KC 	Finishing	●	●	-	-
	Medium	●	●	-	-
	Roughing	●	●	TK15	TK15




- Main application
- Extended application

	Machining type	Material	Continuous	Slight interruption	Interruption
..NGP 	Finishing	●	TS15	TS15	-
	Medium	○	TS15	TS15	-
	Roughing	●	TS15	-	-
..NMA 	Finishing	●	-	-	-
	Medium	○	-	-	-
	Roughing	●	TK15	TK15	TK15
..NMM 	Finishing	●	-	TN15	TN30
	Medium	○	-	-	TN30
	Roughing	●	-	-	-
..NMX 	Finishing	●	NC25	NC25	-
	Medium	○	-	-	-
	Roughing	○	NC25	-	-
- AL 	Finishing	●	-	-	-
	Medium	●	KM15 - ZR10	KM15 - ZR10	KM15 - ZR10
	Roughing	○	KM15 - ZR10	-	-
- AP 	Finishing	●	-	-	-
	Medium	●	KM15 - ZR10	KM15 - ZR10	KM15 - ZR10
	Roughing	○	KM15 - ZR10	-	-
..MR 	Finishing	●	TN15	TN30	TN30
	Medium	●	TN15	TN30	-
	Roughing	○	TN15	-	-
..MT 	Finishing	●	TN15	TN15	TN30
	Medium	●	TN35	TN35	TN35
	Roughing	●	TN15	-	-
..MW 	Finishing	●	PM25	PM25	PM25
	Medium	●	-	-	-
	Roughing	●	KM15	KM15	KM15



Grade chart

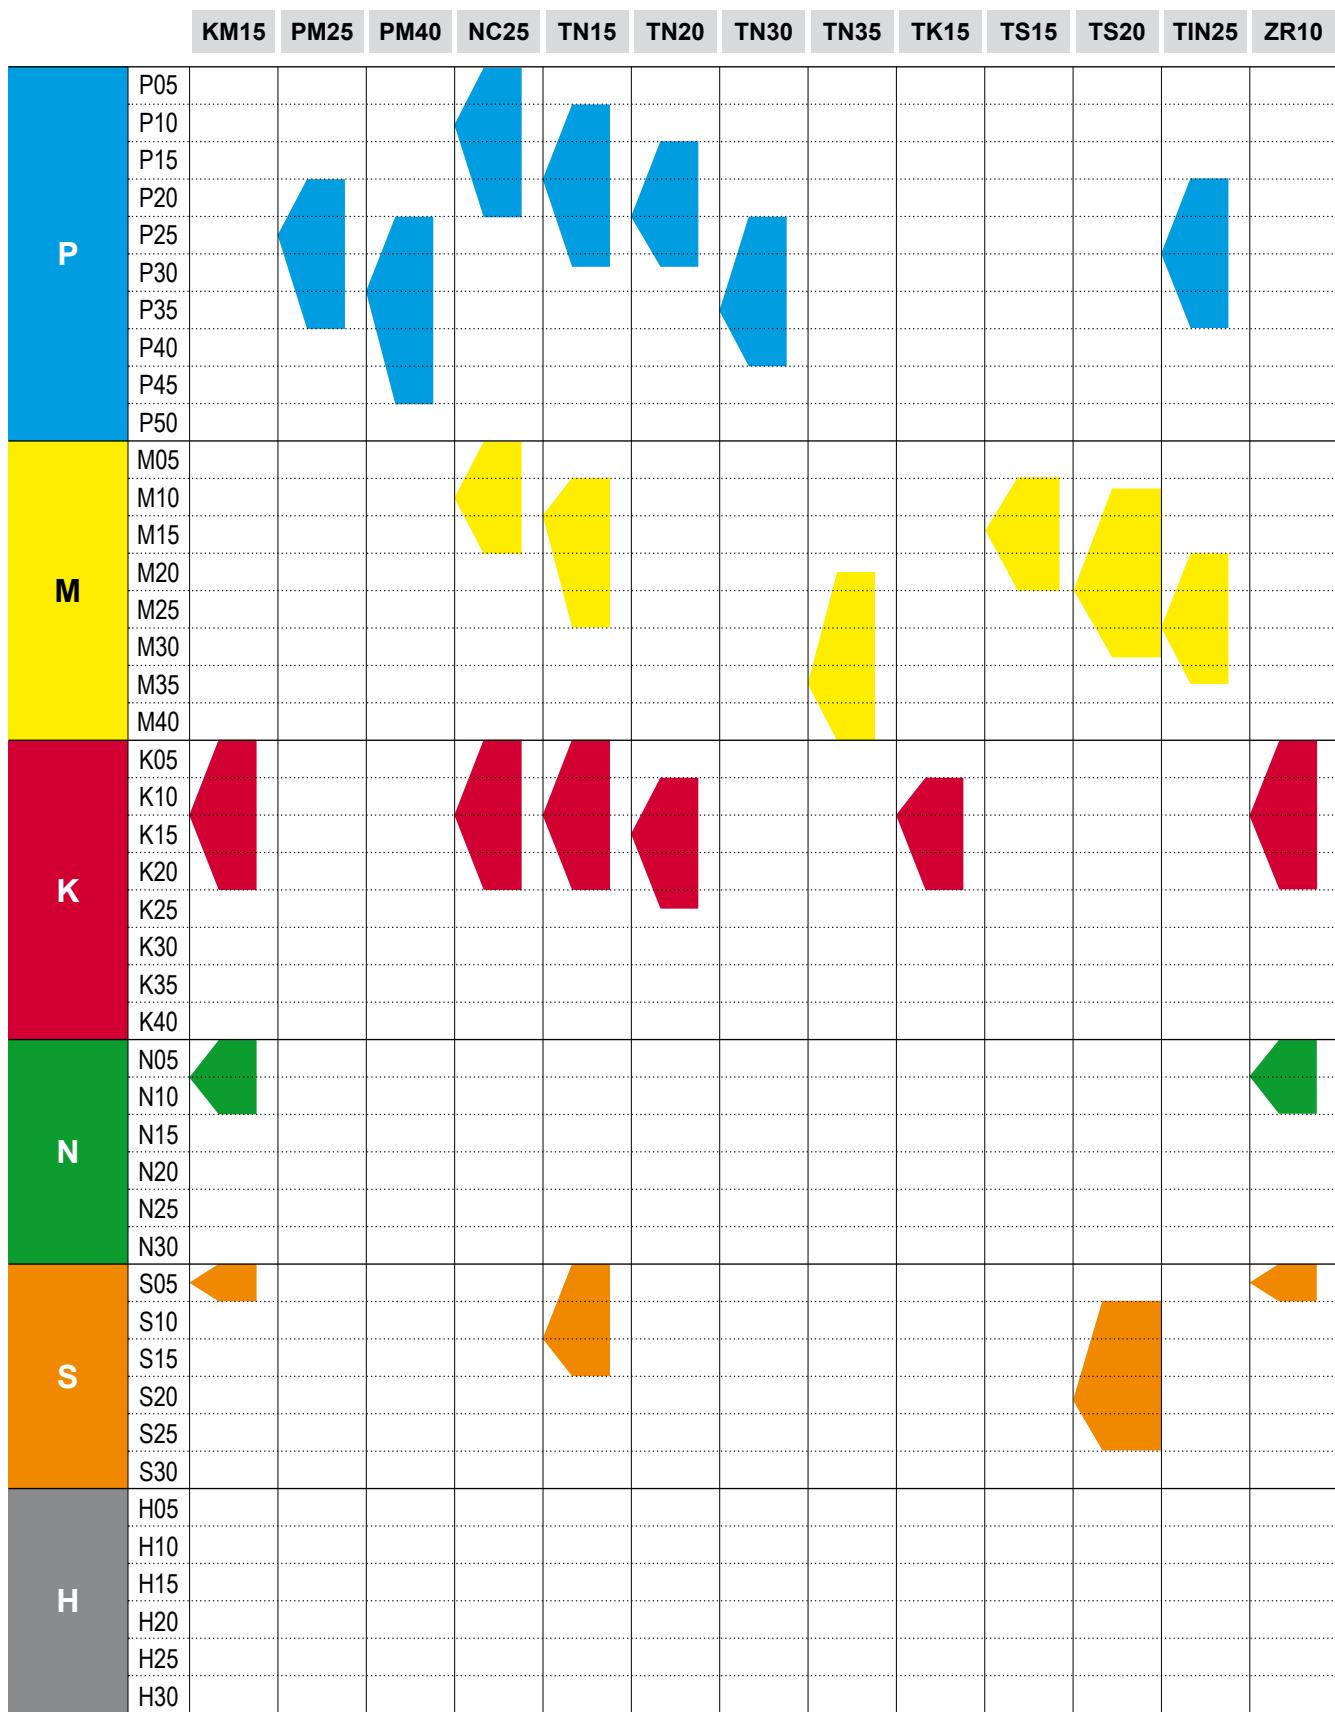




Label designation system

Code key

Shape	Tolerances	Inscribed circle	Corner chamfer/nose radius	Grade
C	N	M	G	12 04 08 MC TN15
				4 3 2
Side clearance angle	Type	Thickness	Chipbreaker	

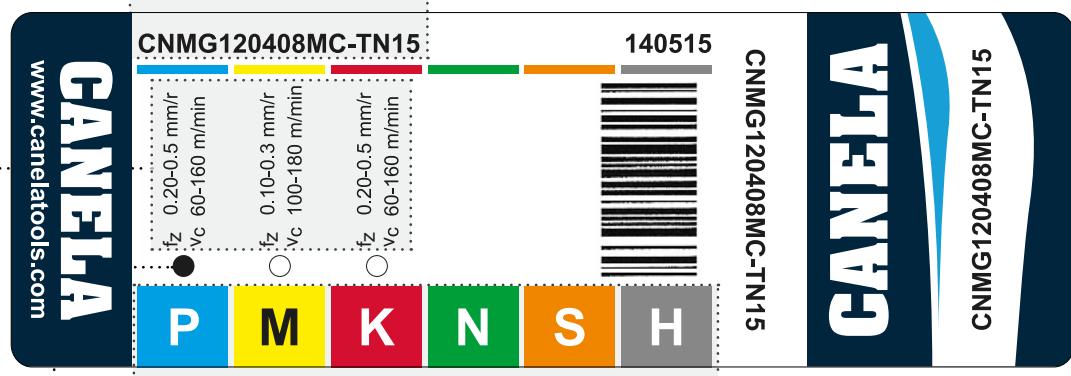

Material group



Application area		P	Blue: Steel Machining, cementation, tempered and constructional steels.
<input checked="" type="radio"/> Main application <input type="radio"/> Extended application		M	Yellow: Stainless steel Machining, cementation, tempered and constructional steels.
		K	Red: Cast iron Cast iron, grey cast iron, tempered iron, spheroidal cast iron, CGI, sintered iron.
		N	Green: Non ferrous materials Al wrought and Al cast alloys, copper, copper alloys, non metal materials.
		S	Orange: Heat-resistant alloys / titanium Ni/Co-base alloys, Ti alloys.
		H	Grey: Hard materials Hardened steels (≥ 45 HRC), chilled castings, hard cast irons.



ISO Code key

INSERT SHAPE	
V	Rhombic 35°
D	Rhombic 55°
E	Rhombic 75°
C	Rhombic 80°
M	Rhombic 86°
K	Parallelogram 55°
B	Parallelogram 82°
A	Parallelogram 85°
L	Rectangular 90°
P	Pentagonal 108°
H	Hexagonal 120°
O	Octagonal 135°
R	Round
S	Square 90°
T	Triangular 60°
W	Trigon 80°
X	Special design

TOLERANCES										
	m	Ø d	s	Detail of M Class insert tolerance (Tolerance of nose height m)						
A	±0.005	±0.025	±0.025	D.I.C						
F	±0.005	±0.013	±0.025	6.35	±0.08	±0.08	±0.08	±0.11	±0.16	-
C	±0.013	±0.025	±0.025	9.525	±0.08	±0.08	±0.08	±0.11	±0.16	-
H	±0.013	±0.013	±0.025	12.70	±0.13	±0.13	±0.13	±0.15	-	-
E	±0.025	±0.025	±0.025	15.875	±0.15	±0.15	±0.15	±0.18	-	-
G	±0.025	±0.025	±0.013	19.05	±0.15	±0.15	±0.15	±0.18	-	-
				25.40	-	±0.18	-	-	-	-
				31.75	-	±0.20	-	-	-	-
	Detail of M Class insert tolerance (Tolerance of inscribed circle d)									
J	±0.005	±0.05 - ±0.15	±0.025	D.I.C						
K	±0.013	±0.05 - ±0.15	±0.025	6.35	±0.05	±0.05	±0.05	±0.05	±0.05	-
L	±0.025	±0.05 - ±0.15	±0.025	9.525	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
M	±0.08 - ±0.20	±0.05 - ±0.15	±0.13	12.70	±0.08	±0.08	±0.08	±0.08	-	±0.08
N	±0.08 - ±0.20	±0.05 - ±0.15	±0.025	15.875	±0.10	±0.10	±0.10	±0.10	-	±0.10
U	±0.13 - ±0.38	±0.08 - ±0.25	±0.13	19.05	±0.10	±0.10	±0.10	±0.10	-	±0.10
				25.40	-	±0.13	-	-	-	±0.13
				31.75	-	±0.15	-	-	-	±0.15

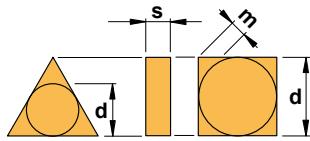

Triangular insert with a facet (Secondary cutting edge)

C N M G

CLEARANCE ANGLE	
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°

SYMBOL FOR FIXING AND/OR FOR CHIPBREAKER (Metric)				
	Hole	Hole configuration	Chipbreaker	Figure
N	Without hole	-	No	
R	Without hole	-	One-sided	
F	Without hole	-	Double-sided	
A	With hole	Cylindrical hole	No	
M	With hole	Cylindrical hole	One-sided	
G	With hole	Cylindrical hole	Double-sided	
W	With hole	Cylindrical hole + One countersink (40-60°)	No	
T	With hole	Cylindrical hole + One countersink (40-60°)	One-sided	
Q	With hole	Cylindrical hole + Double countersink (40-60°)	No	
U	With hole	Cylindrical hole + Double countersink (40-60°)	Double-sided	
B	With hole	Cylindrical hole + One countersink (70-90°)	No	
H	With hole	Cylindrical hole + One countersink (70-90°)	One-sided	
C	With hole	Cylindrical hole + Double countersink (70-90°)	No	
J	With hole	Cylindrical hole + Double countersink (70-90°)	Double-sided	
X	-	-	-	Special



SYMBOL FOR INSERT SIZE									SYMBOL FOR INSERT SIZE (inch.)		INSERT CORNER				CUTTING DIRECTION	
									04	03	03	06		5/32	3,97	
08	05	04	04	08										4,76		
09	06	05	05	09	03		06		7/32		5,56			6,00		
11	07	06	06	11	04				1/4		6,35			7,94		
13	09	08	07	13	05		08				8,00			9,52		
16	11	09	09	16	06				3/8		9,52			10,00		
							10				12,00			12,70		
22	15	12	12	22	08				1/2		15,87			16,00		
	19	16	15	27	10		16				20,00			22,22		
	23	19	19	33	13		20				25,00			25,40		
	27	22	22	38			25				31,75			32,00		
	31	25	25	44				1								
	38	32	31	54				32								

12 04 08 E N FC
4 3 2

SYMBOL FOR INSERT THICKNESS		
	inch.	mm
01	1/16	1,59
02	3/32	2,38
03	1/8	3,18
T3	5/32	3,97
04	3/16	4,76
05	7/32	5,56
06	1/4	6,35
07	5/16	7,94
09	3/8	9,52

S

SYMBOL FOR INSERT THICKNESS (inch.)	
1	1/16
2	1/8
3	3/16
4	1/4
5	5/16
6	3/8

T

SYMBOL FOR CUTTING EDGE CONDITION	
SYMBOL	CUTTING EDGE
F	Sharp
E	Honed
T	Chamfered
S	Chamfered and honed
K	Double-chamfered
P	Double-chamfered and honed

For special forms of the chip groove in the 10° position, manufacturer specific chip grooves and designations can be indicated.

SYMBOL FOR CHIPBREAKER		
AL	AP	CC
FC	FMC	KC
MC	MFC	MHC
MR	MT	MW
NGP	NMA	NMM
NMX	RC	TC



CCGT-AL	CCGT-AP	CCMT	CCMW	CNGP	CNMA
Page A23 7° <input checked="" type="checkbox"/>	Page A24 0° <input type="checkbox"/>	Page A24 0° <input type="checkbox"/>			
CNMG-CC	CNMG-FC	CNMG-FMC	CNMG-KC	CNMG-MC	CNMG-MFC
Page A24 0° <input type="checkbox"/>	Page A24 0° <input type="checkbox"/>	Page A25 0° <input type="checkbox"/>	Page A25 0° <input type="checkbox"/>	Page A25 0° <input type="checkbox"/>	Page A25 0° <input type="checkbox"/>
CNMG-MHC	CNMG-RC	CNMG-TC	CNMM		
Page A26 0° <input type="checkbox"/>					
DCGT-AL	DCGT-AP	DCMT	DCMW	DNGP	DNMA
Page A27 7° <input checked="" type="checkbox"/>	Page A28 0° <input type="checkbox"/>	Page A28 0° <input type="checkbox"/>			
DNMG-FC	DNMG-FMC	DNMG-KC	DNMG-MC	DNMG-MFC	DNMG-MHC
Page A28 0° <input type="checkbox"/>	Page A28 0° <input type="checkbox"/>	Page A29 0° <input type="checkbox"/>	Page A29 0° <input type="checkbox"/>	Page A29 0° <input type="checkbox"/>	Page A29 0° <input type="checkbox"/>
DNMG-TC	DNMX				
Page A30 0° <input type="checkbox"/>	Page A30 0° <input type="checkbox"/>				
KNUX					
Page A30 0° <input type="checkbox"/>					
RCGT-AL	RCGT-AP	RCMT	RNMG		
Page A31 7° <input checked="" type="checkbox"/>	Page A31 7° <input checked="" type="checkbox"/>	Page A31 7° <input checked="" type="checkbox"/>	Page A31 0° <input type="checkbox"/>		



SCGT-AL	SCMT	SCMT-39	SCMW	SNMG-FMC	SNMG-KC
Page A32 7° <input checked="" type="checkbox"/>	Page A32 7° <input checked="" type="checkbox"/>	Page A32 7° <input checked="" type="checkbox"/>	Page A32 7° <input checked="" type="checkbox"/>	Page A33 0° <input type="checkbox"/>	Page A33 0° <input type="checkbox"/>
SNMG-MHC	SNMG-RC	SNMG-TC	SNMM	SPMR	SPUN
Page A33 0° <input type="checkbox"/>	Page A33 0° <input type="checkbox"/>	Page A34 0° <input type="checkbox"/>	Page A34 0° <input type="checkbox"/>	Page A35 11° <input checked="" type="checkbox"/>	Page A35 11° <input checked="" type="checkbox"/>
TCGT-AL	TCMT	TCMW	TNMA	TNMG-CC	TNMG-FC
Page A36 7° <input checked="" type="checkbox"/>	Page A36 7° <input checked="" type="checkbox"/>	Page A36 7° <input checked="" type="checkbox"/>	Page A37 0° <input type="checkbox"/>	Page A37 0° <input type="checkbox"/>	Page A37 0° <input type="checkbox"/>
TNMG-FMC	TNMG-KC	TNMG-MC	TNMG-MFC	TNMG-MHC	TNMG-TC
Page A37 0° <input type="checkbox"/>	Page A37 0° <input type="checkbox"/>	Page A38 0° <input type="checkbox"/>			
TNMX	TPMN	TPMR	TPUN	TPUX	
Page A38 0° <input type="checkbox"/>	Page A39 11° <input checked="" type="checkbox"/>	Page A39 11° <input checked="" type="checkbox"/>	Page A39 11° <input checked="" type="checkbox"/>	Page A39 11° <input checked="" type="checkbox"/>	
VBMT	VCGT-AL	VCGT-AP	VCMT		
Page A40 5° <input checked="" type="checkbox"/>	Page A40 7° <input checked="" type="checkbox"/>	Page A40 7° <input checked="" type="checkbox"/>	Page A40 7° <input checked="" type="checkbox"/>		
VNGP	VNMG	VNMG-TC		WNMA	WNMG-FC
Page A41 0° <input type="checkbox"/>	Page A41 0° <input type="checkbox"/>	Page A41 0° <input type="checkbox"/>		Page A42 0° <input type="checkbox"/>	Page A42 0° <input type="checkbox"/>
WNMG-FMC	WNMG-KC	WNMG-MC	WNMG-MFC	WNMG-MHC	WNMG-TC
Page A42 0° <input type="checkbox"/>	Page A42 0° <input type="checkbox"/>	Page A43 0° <input type="checkbox"/>			



Ceramic inserts


CNGA	CNGN	CNGX	DNGA	DNGN	DNGX
Page A45 0° <input type="checkbox"/>	Page A45 0° <input type="checkbox"/>	Page A45 0° <input type="checkbox"/>	Page A45 0° <input type="checkbox"/>	Page A46 0° <input type="checkbox"/>	Page A46 0° <input type="checkbox"/>
RCGX	RNGN	RPGN	SNGA	SNGN	SNGN
Page A46 7° <input checked="" type="checkbox"/>	Page A47 0° <input type="checkbox"/>	Page A48 0° <input type="checkbox"/>			
SNGX	TNGA	TNGN	VNGA	WNGA	
Page A48 0° <input type="checkbox"/>	Page A48 0° <input type="checkbox"/>	Page A48 0° <input type="checkbox"/>	Page A49 0° <input type="checkbox"/>	Page A49 0° <input type="checkbox"/>	

CBN/PCD Inserts

CCMW	CNGA	DCMW	DNGA	SNGA	TCMW
Page A50 7° <input checked="" type="checkbox"/>	Page A50 0° <input type="checkbox"/>	Page A50 7° <input checked="" type="checkbox"/>	Page A50 0° <input type="checkbox"/>	Page A51 0° <input type="checkbox"/>	Page A51 7° <input checked="" type="checkbox"/>
TNGA	TPMN				
Page A51 0° <input type="checkbox"/>	Page A51 11° <input checked="" type="checkbox"/>				



80° Rhombic inserts / Positive



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
M	Stainless		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
K	Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
N	Non ferrous materials	●																	
S	Heat-resistant alloys															●	●	●	●
H	Hard materials																		

CCGT-AL

Reference	I	T	d	r	7°	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
CCGT21.50-AL	0.254	0.094	0.250	0.008		●	●											
CCGT21.51-AL	0.254	0.094	0.250	0.016		●	●											
CCGT32.50-AL	0.380	0.156	0.375	0.008		●	●											
CCGT32.51-AL	0.380	0.156	0.375	0.016		●	●											
CCGT32.52-AL	0.380	0.156	0.375	0.031		●	●											
CCGT430-AL	0.508	0.187	0.500	0.008		●	●											
CCGT431-AL	0.508	0.187	0.500	0.016		●	●											
CCGT432-AL	0.508	0.187	0.500	0.031		●												

CCGT-AP


Reference	I	T	d	r	7°	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
CCGT21.50-AP	0.254	0.094	0.250	0.008		●	●											
CCGT21.51-AP	0.254	0.094	0.250	0.016		●	●											
CCGT32.50-AP	0.380	0.156	0.375	0.008		●	●											
CCGT32.51-AP	0.380	0.156	0.375	0.016		●	●											
CCGT32.52-AP	0.380	0.156	0.375	0.031		●	●											
CCGT430-AP	0.508	0.187	0.500	0.008		●	●											
CCGT431-AP	0.508	0.187	0.500	0.016		●	●											
CCGT432-AP	0.508	0.187	0.500	0.031		●												

CCMT

Reference	I	T	d	r	7°	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
CCMT21.50	0.254	0.094	0.250	0.008		●	●											
CCMT21.51	0.254	0.094	0.250	0.016		●	●											
CCMT32.51	0.380	0.156	0.375	0.016		●	●											
CCMT32.52	0.380	0.156	0.375	0.031		●	●											
CCMT432	0.508	0.187	0.500	0.031		●												

CCMW

Reference	I	T	d	r	7°	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
CCMW21.50	0.254	0.094	0.250	0.008		●	●											
CCMW21.51	0.254	0.094	0.250	0.016		●	●											
CCMW32.51	0.380	0.156	0.375	0.016		●	●											
CCMW32.52	0.380	0.156	0.375	0.031		●	●											
CCMW432	0.508	0.187	0.500	0.031		●												

**80° Rhombic inserts / Negative****USE CLASSIFICATION**

- Continuous
- Slight interruption
- ✖ Interruption

AVAILABILITY


- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

**CNGP**



Reference	I	T	d	r
CNGP431	0.508	0.187	0.500	0.016
CNGP432	0.508	0.187	0.500	0.031

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10

**CNMA**


Reference	I	T	d	r
CNMA432	0.508	0.187	0.500	0.031
CNMA433	0.508	0.187	0.500	0.047

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10

**CNMG-CC**


Reference	I	T	d	r
CNMG431CC	0.508	0.187	0.500	0.016
CNMG432CC	0.508	0.187	0.500	0.031

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10

**CNMG-FC**


Reference	I	T	d	r
CNMG321FC	0.380	0.125	0.375	0.016
CNMG322FC	0.380	0.125	0.375	0.031
CNMG431FC	0.508	0.187	0.500	0.016

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10





80° Rhombic inserts / Negative



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

CNMG-FMC



Reference

Reference	I	T	d	r
CNMG431FMC	0.508	0.187	0.500	0.016

KM15

PM25

PM40

NC25

TN15

TN20

TN30

TN35


TK15

TS15

TS20

TIN25

ZR10



CNMG-KC



Reference

Reference	I	T	d	r
CNMG432KC	0.508	0.187	0.500	0.031
CNMG433KC	0.508	0.187	0.500	0.047

KM15

PM25

PM40

NC25

TN15

TN20

TN30

TN35


TK15

TS15

TS20

TIN25

ZR10



CNMG-MC



Reference

Reference	I	T	d	r
CNMG322MC	0.380	0.125	0.375	0.031
CNMG431MC	0.508	0.187	0.500	0.016
CNMG432MC	0.508	0.187	0.500	0.031

KM15

PM25

PM40

NC25

TN15

TN20

TN30

TN35


TK15

TS15

TS20

TIN25

ZR10



CNMG-MFC



Reference

Reference	I	T	d	r
CNMG432MFC	0.508	0.187	0.500	0.031

KM15

PM25

PM40

NC25

TN15

TN20

TN30

TN35


TK15

TS15

TS20


TIN25

ZR10





80° Rhombic inserts / Negative


USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY


- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													




CNMG-MHC

Reference	I	T	d	r
CNMG432MHC	0.508	0.187	0.500	0.031
CNMG433MHC	0.508	0.187	0.500	0.047




CNMG-RC

Reference	I	T	d	r
CNMG432RC	0.508	0.187	0.500	0.031
CNMG433RC	0.508	0.187	0.500	0.047
CNMG542RC	0.630	0.250	0.625	0.031
CNMG543RC	0.630	0.250	0.625	0.047
CNMG643RC	0.760	0.250	0.750	0.047




CNMG-TC

Reference	I	T	d	r
CNMG431TC	0.508	0.187	0.500	0.016
CNMG432TC	0.508	0.187	0.500	0.031




CNMM

Reference	I	T	d	r
CNMM432	0.508	0.187	0.500	0.031
CNMM543	0.630	0.250	0.620	0.047
CNMM643	0.760	0.250	0.750	0.047





55° Rhombic inserts / Positive


USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
M	Stainless			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
K	Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
N	Non ferrous materials	●																
S	Heat-resistant alloys															●	●	●
H	Hard materials																	

DCGT-AL

Reference
I T d r
7°

DCGT21.50-AL	0.305	0.094	0.250	0.008
DCGT21.51-AL	0.305	0.094	0.250	0.016
DCGT32.50-AL	0.457	0.156	0.375	0.008
DCGT32.51-AL	0.457	0.156	0.375	0.016
DCGT32.52-AL	0.457	0.156	0.375	0.031

KM15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
PM25																		
PM40																		
NC25																		
TN15																		
TN20																		
TN30																		
TN35																		
TK15																		
TS15																		
TS20																		
TIN25																		
ZR10																		

DCGT-AP

Reference
I T d r
7°

DCGT21.50-AP	0.305	0.094	0.250	0.008
DCGT21.51-AP	0.305	0.094	0.250	0.016
DCGT32.50-AP	0.457	0.156	0.375	0.008
DCGT32.51-AP	0.457	0.156	0.375	0.016
DCGT32.52-AP	0.457	0.156	0.375	0.031

KM15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
PM25																		
PM40																		
NC25																		
TN15																		
TN20																		
TN30																		
TN35																		
TK15																		
TS15																		
TS20																		
TIN25																		
ZR10																		

DCMT

Reference
I T d r
7°

DCMT21.51	0.305	0.094	0.250	0.016
DCMT32.51	0.457	0.156	0.375	0.016
DCMT32.52	0.457	0.156	0.375	0.031

KM15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
PM25																		
PM40																		
NC25																		
TN15																		
TN20																		
TN30																		
TN35																		
TK15																		
TS15																		
TS20																		
TIN25																		
ZR10																		

DCMW


Reference
I T d r
7°

DCMW32.51	0.457	0.156	0.375	0.016
DCMW32.52	0.457	0.156	0.375	0.031

KM15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
PM25																		
PM40																		
NC25																		
TN15																		
TN20																		
TN30																		
TN35																		
TK15																		
TS15																		
TS20																		
TIN25																		
ZR10																		




55° Rhombic inserts / Negative



USE CLASSIFICATION
● Continuous
● Slight interruption
✖ Interruption


AVAILABILITY
● Standard item
○ Check Availability

P	Steel	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖
M	Stainless		✖		✖		✖		✖		✖			
K	Cast iron	✖	✖		✖									
N	Non ferrous materials	✖												
S	Heat-resistant alloys										✖	✖	✖	
H	Hard materials													




DNGP

Reference	I	T	d	r
DNGP431	0.610	0.187	0.500	0.016
DNGP432	0.610	0.187	0.500	0.031




DNMA

Reference	I	T	d	r
DNMA442	0.610	0.250	0.500	0.031
DNMA443	0.610	0.250	0.500	0.047



DNMG-FC

Reference	I	T	d	r
DNMG331FC	0.457	0.187	0.375	0.016
DNMG332FC	0.457	0.187	0.375	0.031
DNMG431FC	0.610	0.187	0.500	0.016
DNMG441FC	0.610	0.250	0.500	0.016



DNMG-FMC


Reference	I	T	d	r
DNMG431FMC	0.610	0.187	0.500	0.016
DNMG441FMC	0.610	0.250	0.500	0.016

KM15				
PM25				
PM40				
NC25				
TN15				
TN20				
TN30				
TN35				
TK15				
TS15				
TS20				
TIN25				
ZR10				

KM15				
PM25				
PM40				
NC25				
TN15				
TN20				
TN30				
TN35				
TK15				
TS15				
TS20				
TIN25				
ZR10				



55° Rhombic inserts / Negative



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

DNMG-KC

Reference	I	T	d	r
DNMG442KC	0.610	0.250	0.500	0.031
DNMG443KC	0.610	0.250	0.500	0.047

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10

DNMG-MC

Reference	I	T	d	r
DNMG332MC	0.457	0.187	0.375	0.031
DNMG432MC	0.610	0.187	0.500	0.031
DNMG442MC	0.610	0.250	0.500	0.031

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10

DNMG-MFC

Reference	I	T	d	r
DNMG442MFC	0.610	0.250	0.500	0.031

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10


DNMG-MHC

Reference	I	T	d	r
DNMG432MHC	0.610	0.187	0.500	0.031
DNMG442MHC	0.610	0.250	0.500	0.031
DNMG443MHC	0.610	0.250	0.500	0.047

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10




55° Rhombic inserts / Negative



USE CLASSIFICATION
● Continuous
● Slight interruption
✖ Interruption


AVAILABILITY
● Standard item
○ Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron	●	✖		●					●				
N	Non ferrous materials	●												
S	Heat-resistant alloys										●	✖		
H	Hard materials												●	



DNMG-TC


Reference	I	T	d	r
DNMG442TC	0.610	0.250	0.500	0.031



DNMX

Reference	I	T	d	r
DNMX441R-22	0.610	0.250	0.500	0.016
DNMX442R-22	0.610	0.250	0.500	0.031

KNUX inserts / Negative



USE CLASSIFICATION
● Continuous
● Slight interruption
✖ Interruption

AVAILABILITY
● Standard item
○ Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron	●	✖		●					●				
N	Non ferrous materials	●												
S	Heat-resistant alloys										●	✖		
H	Hard materials												●	




KNUX

Reference	I	T	d	r
KNUX160405L-21	0.630	0.187	0.375	0.020
KNUX160405R-21	0.630	0.187	0.375	0.020
KNUX160405R-32	0.630	0.187	0.375	0.020
KNUX160410L-21	0.630	0.187	0.375	0.039
KNUX160410R-21	0.630	0.187	0.375	0.039
KNUX160410R-32	0.630	0.187	0.375	0.039



Round inserts / Positive



i USE CLASSIFICATION

- Continuous
- Slight interruption
- ✖ Interruption

i AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													


RCGT-AL

Reference

T

d

7°

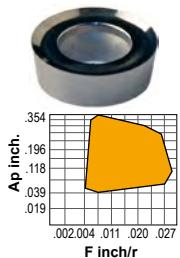


RCGT-AP

Reference

T

d

7°

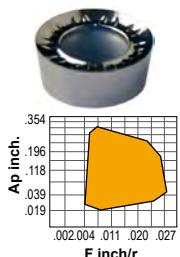


RCMT

Reference


T

d

7°

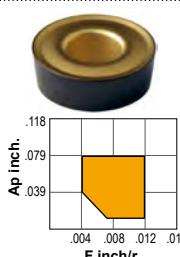

Round inserts / Negative



i USE CLASSIFICATION

- Continuous
- Slight interruption
- ✖ Interruption

i AVAILABILITY

- Standard item
- Check Availability


P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

RNMG

Reference

T


d

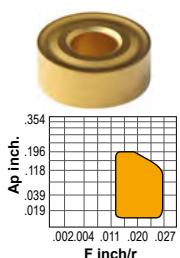

KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10	
○ ○													



Square inserts / Positive


USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption


AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless	●	●	●	●	●	●	●	●	●	●	●	●	●
K	Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●
N	Non ferrous materials	●	●	●	●	●	●	●	●	●	●	●	●	●
S	Heat-resistant alloys	●	●	●	●	●	●	●	●	●	●	●	●	●
H	Hard materials	●	●	●	●	●	●	●	●	●	●	●	●	●


SCGT-AL

Reference	I	T	d	r
SCGT32.51-AL	0.375	0.156	0.375	0.016
SCGT32.52-AL	0.375	0.156	0.375	0.031
SCGT432-AL	0.500	0.187	0.500	0.031




SCMT

Reference	I	T	d	r
SCMT32.51	0.375	0.156	0.375	0.016
SCMT32.52	0.375	0.156	0.375	0.031
SCMT432	0.500	0.187	0.500	0.031




SCMT-39

Reference	I	T	d	r
SCMT32.51-39	0.375	0.156	0.375	0.016
SCMT32.52-39	0.375	0.156	0.375	0.031
SCMT432-39	0.500	0.187	0.500	0.031
SCMT433-39	0.500	0.187	0.500	0.047




SCMW

Reference	I	T	d	r
SCMW32.52	0.375	0.156	0.375	0.031
SCMW432	0.500	0.187	0.500	0.031
SCMW433	0.500	0.187	0.500	0.047





Square inserts / Negative



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

SNMG-FMC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
SNMG431FMC	0.500	0.187	0.500	0.016					●								

SNMG-KC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
SNMG432KC	0.500	0.187	0.500	0.031									●				


SNMG-MHC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
SNMG432MHC	0.500	0.187	0.500	0.031						●	●						


SNMG-RC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
SNMG433RC	0.500	0.187	0.500	0.047													
SNMG543RC	0.625	0.250	0.625	0.047						●	●						
SNMG644RC	0.750	0.250	0.750	0.063						●							

Square inserts / Negative




-  USE CLASSIFICATION
-  Continuous
-  Slight interruption
-  Interruption



SNMG-TC

Reference	I	T	d	r	KM1	PM2	PM4	NC2	TN11	TN21	TN31	TN32	TK11	TS11	TS20	TIN2	ZR11
SNMG432TC	0.500	0.187	0.500	0.031											●		




SNMM

Reference	I	T	d	r	KM1	PM2	PM4	NC2	TN11	TN21	TN31	TK15	TS11	TS20	TIN2	ZR11
SNMM644	0.750	0.250	0.750	0.063												
SNMM856	1.000	0.312	1.000	0.094						○ ○						



Square inserts / Positive



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY


- Standard item
- Check Availability

P	Steel	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
M	Stainless	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
K	Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
N	Non ferrous materials	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
S	Heat-resistant alloys	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
H	Hard materials	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

SPMR

Reference	I	T	d	r
SPMR322	0.375	0.125	0.375	0.031
SPMR421	0.500	0.125	0.500	0.016
SPMR422	0.500	0.125	0.500	0.031


11°



SPUN


Reference	I	T	d	r
SPUN321E	0.375	0.125	0.375	0.016
SPUN322E	0.375	0.125	0.375	0.031
SPUN421E	0.500	0.125	0.500	0.016
SPUN422E	0.500	0.125	0.500	0.031
SPUN422F	0.500	0.125	0.500	0.031
SPUN423E	0.500	0.125	0.500	0.047
SPUN432E	0.500	0.187	0.500	0.031
SPUN532E	0.625	0.187	0.625	0.031
SPUN533E	0.625	0.187	0.625	0.047
SPUN632E	0.750	0.187	0.750	0.047

11°





Triangular inserts / Positive



USE CLASSIFICATION
● Continuous
● Slight interruption
✖ Interruption

AVAILABILITY
● Standard item
○ Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

TCGT-AL

Reference	I	T	d	r
TCGT21.50-AL	0.433	0.094	0.250	0.008
TCGT21.51-AL	0.433	0.094	0.250	0.016
TCGT32.50-AL	0.650	0.156	0.375	0.008
TCGT32.51-AL	0.650	0.156	0.375	0.016
TCGT32.52-AL	0.650	0.156	0.375	0.031

TCMT


Reference	I	T	d	r
TCMT090204	0.379	0.094	0.218	0.016
TCMT21.51	0.433	0.094	0.250	0.016
TCMT32.51	0.650	0.156	0.375	0.016
TCMT32.52	0.650	0.156	0.375	0.031
TCMT432	0.866	0.187	0.500	0.031
TCMT433	0.866	0.187	0.500	0.047

TCMW

Reference	I	T	d	r
TCMW21.51	0.433	0.094	0.250	0.016
TCMW32.51	0.650	0.156	0.375	0.016
TCMW32.52	0.650	0.156	0.375	0.031



Triangular inserts / Negative



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

TNMA

Reference	I	T	d	r
TNMA332	0.650	0.187	0.375	0.031
TNMA432	0.866	0.187	0.500	0.031
TNMA433	0.866	0.187	0.500	0.047
TNMA434	0.866	0.187	0.500	0.063

TNMG-CC

Reference	I	T	d	r
TNMG331CC	0.650	0.187	0.375	0.016
TNMG332CC	0.650	0.187	0.375	0.031

TNMG-FC

Reference	I	T	d	r
TNMG331FC	0.650	0.187	0.375	0.016
TNMG431FC	0.866	0.187	0.500	0.016

TNMG-FMC


Reference	I	T	d	r
TNMG331FMC	0.650	0.187	0.375	0.016

TNMG-KC

Reference	I	T	d	r
TNMG332KC	0.650	0.187	0.375	0.031
TNMG333KC	0.650	0.187	0.375	0.047
TNMG432KC	0.866	0.187	0.500	0.031



Triangular inserts / Negative



USE CLASSIFICATION

- Continuous
- Slight interruption
- ✖ Interruption

AVAILABILITY


- Standard item
- Check Availability

P	Steel	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖
M	Stainless		✖		✖		✖		✖		✖			
K	Cast iron	●	✖		●		●							
N	Non ferrous materials	●												
S	Heat-resistant alloys										●	✖	✖	
H	Hard materials													

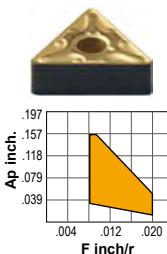


TNMG-MC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
TNMG331MC	0.650	0.187	0.375	0.016													
TNMG332MC	0.650	0.187	0.375	0.031					●		●	●					
TNMG432MC	0.866	0.187	0.500	0.031					●		●	●					
TNMG433MC	0.866	0.187	0.500	0.047					●								

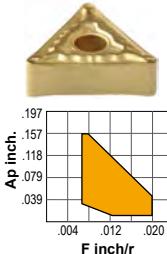


TNMG-MFC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
TNMG332MFC	0.650	0.187	0.375	0.031					●		●						

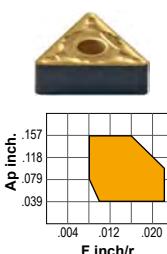


TNMG-MHC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
TNMG332MHC	0.650	0.187	0.375	0.031					●								
TNMG333MHC	0.650	0.187	0.375	0.047						●	●						
TNMG432MHC	0.866	0.187	0.500	0.031						●	●						
TNMG433MHC	0.866	0.187	0.500	0.047						●							

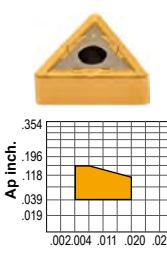

TNMG-TC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
TNMG332TC	0.650	0.187	0.375	0.031									●				

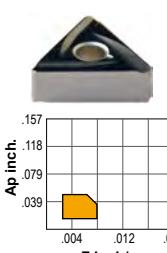


TNMX

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
TNMX331R	0.650	0.187	0.375	0.016				●									
TNMX332R	0.650	0.187	0.375	0.031				●									
TNMX331L	0.650	0.187	0.375	0.016				●									
TNMX332L	0.650	0.187	0.375	0.031				●									



Triangular inserts / Positive


USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability


P	Steel	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
M	Stainless		○	○	○	○	○	○	○	○	○	○	○	○	○	○
K	Cast iron	●	●											●		
N	Non ferrous materials	●														
S	Heat-resistant alloys												●	●	●	●
H	Hard materials															


TPMN
Reference

Reference	I	T	d	r
-----------	---	---	---	---

TPMN322	0.650	0.125	0.375	0.031
---------	-------	-------	-------	-------

KM15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
PM25																
PM40																
NC25	●															
TN15																
TN20																
TN30																
TN35																
TK15																
TS15																
TS20																
TIN25																
ZR10																

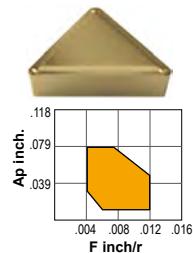
TPMR
Reference

Reference	I	T	d	r
-----------	---	---	---	---

TPMR090204	0.379	0.094	0.218	0.016
------------	-------	-------	-------	-------


TPMR221	0.433	0.125	0.250	0.016
---------	-------	-------	-------	-------

TPMR222	0.433	0.125	0.250	0.031
---------	-------	-------	-------	-------

TPMR321	0.650	0.125	0.375	0.016
---------	-------	-------	-------	-------

TPMR322	0.650	0.125	0.375	0.031
---------	-------	-------	-------	-------

KM15																
PM25																
PM40																
NC25																
TN15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
TN20																
TN30																
TN35																
TK15																
TS15																
TS20																
TIN25																
ZR10																

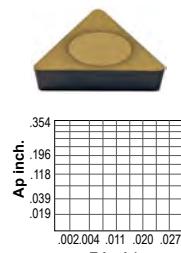
TPUN
Reference

Reference	I	T	d	r
-----------	---	---	---	---

TPUN21.51E	0.433	0.094	0.250	0.016
------------	-------	-------	-------	-------

TPUN21.51F	0.433	0.094	0.250	0.016
------------	-------	-------	-------	-------

TPUN21.52E	0.433	0.094	0.250	0.031
------------	-------	-------	-------	-------

TPUN221E	0.433	0.125	0.250	0.016
----------	-------	-------	-------	-------

TPUN222E	0.433	0.125	0.250	0.031
----------	-------	-------	-------	-------

TPUN321E	0.650	0.125	0.375	0.016
----------	-------	-------	-------	-------

TPUN321F	0.650	0.125	0.375	0.016
----------	-------	-------	-------	-------

TPUN322T	0.650	0.125	0.375	0.031
----------	-------	-------	-------	-------

TPUN322E	0.650	0.125	0.375	0.031
----------	-------	-------	-------	-------

TPUN322F	0.650	0.125	0.375	0.031
----------	-------	-------	-------	-------

TPUN323E	0.650	0.125	0.375	0.047
----------	-------	-------	-------	-------


TPUN323F	0.650	0.125	0.375	0.047
----------	-------	-------	-------	-------

TPUN432E	0.866	0.187	0.500	0.031
----------	-------	-------	-------	-------

TPUN432F	0.866	0.187	0.500	0.031
----------	-------	-------	-------	-------

TPUN433E	0.866	0.187	0.500	0.047
----------	-------	-------	-------	-------

KM15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
PM25																
PM40																
NC25																
TN15																
TN20																
TN30																
TN35																
TK15																
TS15																
TS20																
TIN25																
ZR10																

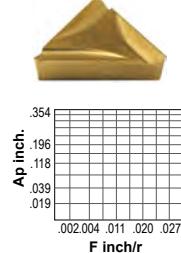
TPUX
Reference

Reference	I	T	d	r
-----------	---	---	---	---

TPUX221L	0.433	0.125	0.250	0.016
----------	-------	-------	-------	-------

TPUX221R	0.433	0.125	0.250	0.016
----------	-------	-------	-------	-------

TPUX321L	0.650	0.125	0.375	0.016
----------	-------	-------	-------	-------

TPUX321R	0.650	0.125	0.375	0.016
----------	-------	-------	-------	-------


TPUX322L	0.650	0.125	0.375	0.031
----------	-------	-------	-------	-------

TPUX322R	0.650	0.125	0.375	0.031
----------	-------	-------	-------	-------

TPUX432L	0.866	0.187	0.500	0.031
----------	-------	-------	-------	-------

TPUX432R	0.866	0.187	0.500	0.031
----------	-------	-------	-------	-------


KM15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
PM25																
PM40																
NC25																
TN15																
TN20																
TN30																
TN35																
TK15																
TS15																
TS20																
TIN25																
ZR10																

**35° Rhombic inserts / Positive**

USE CLASSIFICATION
● Continuous
● Slight interruption
● Interruption


AVAILABILITY
● Standard item
○ Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

**VBMT**


Reference	I	T	d	r
VBMT331	0.650	0.187	0.375	0.016
VBMT332	0.650	0.187	0.375	0.031

5°

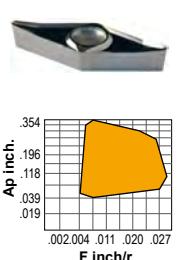**VCGT-AL**


Reference	I	T	d	r
VCGT331-AL	0.650	0.187	0.375	0.016
VCGT332-AL	0.650	0.187	0.375	0.031
VCGT333-AL	0.650	0.187	0.375	0.047
VCGT220530-AL	0.870	0.219	0.500	0.118

7°

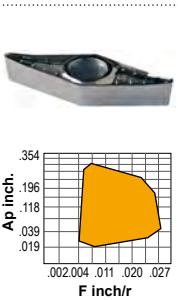**VCGT-AP**

Reference	I	T	d	r
VCGT331-AP	0.650	0.187	0.375	0.016
VCGT332-AP	0.650	0.187	0.375	0.031
VCGT333-AP	0.650	0.187	0.375	0.047
VCGT220530-AP	0.870	0.219	0.500	0.118

7°

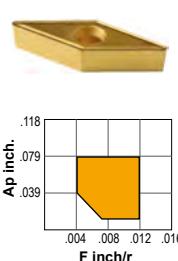
**VCMT**

Reference	I	T	d	r
VCMT221	0.433	0.125	0.250	0.016
VCMT331	0.650	0.187	0.375	0.016
VCMT332	0.650	0.187	0.375	0.031

7°



35° Rhombic inserts / Negative



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless	●	●	●	●	●	●	●	●	●	●	●	●	●
K	Cast iron	●	●	●	●	●	●	●	●	●	●	●	●	●
N	Non ferrous materials	●	●	●	●	●	●	●	●	●	●	●	●	●
S	Heat-resistant alloys	●	●	●	●	●	●	●	●	●	●	●	●	●
H	Hard materials	●	●	●	●	●	●	●	●	●	●	●	●	●

VNGP



Reference	I	T	d	r
VNGP331	0.650	0.187	0.375	0.016
VNGP332	0.650	0.187	0.375	0.031

VNMG

Reference	I	T	d	r
VNMG332	0.650	0.187	0.375	0.031


VNMG-TC

Reference	I	T	d	r
VNMG332TC	0.650	0.187	0.375	0.031





80° Trigon inserts / Negative


USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

WNMA

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMA432	0.320	0.187	0.500	0.031													

WNMG-FC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMG431FC	0.320	0.187	0.500	0.016					●								

WNMG-FMC


Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMG431FMC	0.320	0.187	0.500	0.016					●								

WNMG-KC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMG432KC	0.320	0.187	0.500	0.031									●				
WNMG433KC	0.320	0.187	0.500	0.047									●				



80° Trigon inserts / Negative



USE CLASSIFICATION

- Continuous
- Slight interruption
- Interruption

AVAILABILITY

- Standard item
- Check Availability

P	Steel	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
M	Stainless													
K	Cast iron													
N	Non ferrous materials													
S	Heat-resistant alloys													
H	Hard materials													

WNMG-MC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMG331MC	0.241	0.187	0.375	0.016													
WNMG332MC	0.241	0.187	0.375	0.031					●	●							
WNMG432MC	0.320	0.187	0.500	0.031					●	●	●	●					

WNMG-MFC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMG432MFC	0.320	0.187	0.500	0.031					●								

WNMG-MHC








Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMG432MHC	0.320	0.187	0.500	0.031					●	●							
WNMG433MHC	0.320	0.187	0.500	0.047					●								

WNMG-TC

Reference	I	T	d	r	KM15	PM25	PM40	NC25	TN15	TN20	TN30	TN35	TK15	TS15	TS20	TIN25	ZR10
WNMG432TC	0.320	0.187	0.500	0.031										●			



Turning insert wear and tool life

	Problem	Cause and remedy
Flank and notch wear 	<p>▼ Rapid flank wear causing poor surface finish or out of tolerance (a). ▼ Notch wear causing poor surface finish and risk of edge breakage.</p>	<ul style="list-style-type: none"> ▲ A too high cutting speed or insufficient wear resistance (a). ▲ Oxidation or excessive attrition wear caused by a hard surface (b,c). Reduce the cutting speed. Select a more wear resistant grade. Select an Al₂O₃ coated grade for steel machining. For work hardening materials select a larger lead angle or a more wear resistant grade.
Crater wear 	<p>▼ Excessive crater wear causing a weakened edge. Cutting edge break through on the trailing edge causes poor surface finish.</p>	<ul style="list-style-type: none"> ▲ Diffusion wear due to too high cutting temperatures on the rake face. Select an Al₂O₃ coated grade. Select a positive insert geometry. Obtain a lower temperature by reducing the feed and speed.
Plastic deformation 	<p>▼ Plastic deformation (edge depression (a) or flank impression (b)) leading to poor chip control and poor surface finish. Risk of excessive flank wear leading to insert breakage.</p>	<ul style="list-style-type: none"> ▲ A too high cutting temperature in combination with a high pressure. Select a harder grade with better resistance to plastic deformation. (a) Reduce cutting speed. (b) Reduce feed.
Built-up edge 	<p>▼ Built-up edge (B.U.E.) causing poor surface finish and cutting edge frittering when the B.U.E. is torn away.</p>	<ul style="list-style-type: none"> ▲ Workpiece material is welded to the insert due to: - low cutting speed. - negative cutting geometry. - "sticky" material, e.g. certain stainless steels and pure aluminium. Increase cutting speed. Select a positive geometry. Increase cutting speed drastically. If tool life turns out to be short, apply coolant in large quantities.
Chip hammering 	<p>▼ The part of the cutting edge not in cut is damaged through chip hammering. Both the top side and the support for the insert, can be damaged.</p>	<ul style="list-style-type: none"> ▲ The chips are of an excessive length and are deflected against the cutting edge. Change the feed slightly. Select an alternative insert geometry. Change the lead angle of the holder.
Frittering 	<p>▼ Small cutting edge fractures (frittering) causing poor surface finish and excessive flank wear.</p>	<ul style="list-style-type: none"> ▲ Grade too brittle. ▲ Insert geometry too weak. ▲ Built-up edge. Select a tougher grade. Select an insert with a stronger geometry. Increase cutting speed or select a positive geometry.
Thermal cracks 	<p>▼ Small cracks perpendicular to the cutting edge causing frittering and poor surface finish.</p>	<ul style="list-style-type: none"> ▲ Thermal cracks due to temperature variations caused by: - Intermittent machining. - Varying coolant supply. Select a tougher grade with better resistant to thermal shocks. Coolant should be applied copiously or not at all.
Insert breakage 	<p>▼ Insert breakage that damages not only the insert but also the shim and workpiece.</p>	<ul style="list-style-type: none"> ▲ Grade too brittle. ▲ Excessive load on the insert. ▲ Insert geometry too weak. ▲ Insert size is too small. Select a tougher grade. Reduce the feed and/or the depth of the cut. Select a stronger geometry, preferably a single sided insert. Select a thicker/larger insert.



Ceramic inserts

USE CLASSIFICATION

- Continuous
- Slight interruption
- ❖ Interruption

AVAILABILITY

- Standard item
- Check availability

Material

K Cast iron

S Heat-resistant alloys


H Hard materials

Grade

● Continuous

● Slight interruption

❖ Interruption



CNGA

80° rhombic negative insert.

Reference

I

T

d

r

CX6


CX9

CC2

CC7

CW1

CNGA431	0.508	0.187	0.500	0.016	●				
CNGA432	0.508	0.187	0.500	0.031	●	●	●	●	
CNGA433	0.508	0.187	0.500	0.047	●	●	●	●	



CNGN

80° rhombic negative insert.

Reference

I

T

d

r

CX6


CX9

CC2

CC7

CW1

CNGN432	0.508	0.187	0.500	0.031		●	●	●	●
CNGN433	0.508	0.187	0.500	0.047		●	●	●	●
CNGN452	0.508	0.312	0.500	0.031		●	●	●	●
CNGN453	0.508	0.312	0.500	0.047		●	●	●	●
CNGN454	0.508	0.312	0.500	0.063		●	●	●	●



CNGX

80° rhombic negative insert.

Reference

I

T

d

r

CX6


CX9

CC2

CC7

CW1

CNGX452	0.508	0.312	0.500	0.031	●	●			
CNGX453	0.508	0.312	0.500	0.047	●	●	●		
CNGX454	0.508	0.312	0.500	0.063	●	●	●		
CNGX553	0.634	0.312	0.625	0.047	●	●			
CNGX554	0.634	0.312	0.625	0.063	●	●			



DNGA

55° rhombic negative insert.

Reference

I

T

d

r

CX6

CX9

CC2

CC7

CW1

DNGA431	0.508	0.187	0.500	0.016	●				
DNGA432	0.508	0.187	0.500	0.031	●	●	●	●	
DNGA433	0.508	0.187	0.500	0.047	●	●	●	●	



Ceramic inserts

USE CLASSIFICATION


- Continuous
- Slight interruption
- ❖ Interruption

AVAILABILITY


- Standard item
- Check availability

Material


Grade	● Continuous	● Slight interruption	❖ Interruption
CC2			
CX6			
CW1			
CX9			
CW1			
CC7			

K Cast iron**S** Heat-resistant alloys**H** Hard materials
DNGN
Reference

Reference	I	T	d	r	CX6	CX9	CC2	CC7	CW1
DNGN452	0.610	0.312	0.500	0.031			●		●
DNGN453	0.610	0.312	0.500	0.047			●	●	●
DNGN454	0.610	0.312	0.500	0.063			●		


DNGX
Reference

Reference	I	T	d	r	CX6	CX9	CC2	CC7	CW1
DNGX452	0.610	0.312	0.500	0.031	●				
DNGX453	0.610	0.312	0.500	0.047	●	●			
DNGX454	0.610	0.312	0.500	0.063	●	●	●		


RCGX
Reference

Reference	T	d	a	CX6	CX9	CC2	CC7	CW1
RCGX060700	0.312	0.250	120°			●		●
RCGX090700	0.312	0.375	120°		●	●		●
RCGX120700	0.312	0.500	120°		●	●		●
RCGX151000	0.394	0.625	120°		●	●		●
RCGX191000	0.394	0.750	120°		●	●		●
RCGX251200	0.472	1.000	140°		●			



Ceramic inserts

USE CLASSIFICATION

- Continuous
- Slight interruption
- ❖ Interruption

AVAILABILITY

- Standard item
- Check availability

Material

K Cast iron

S Heat-resistant alloys


H Hard materials

Grade

● Continuous

● Slight interruption

❖ Interruption



RNGN

Round negative inserts.

Reference

T

d

CX6

CX9

CC2

CC7

CW1

RPGN

Round negative inserts.

Reference

T

d


CX6

CX9

CC2

CC7

CW1

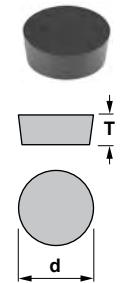

SNGA

Square negative insert.

Reference

I

T

d

r


CX6

CX9

CC2

CC7

CW1



SNGN

Square negative insert.

Reference

I

T

d

r


CX6

CX9

CC2

CC7

CW1

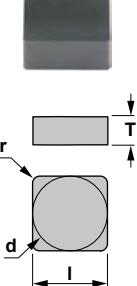



Ceramic inserts

USE CLASSIFICATION


- Continuous
- Slight interruption
- ✖ Interruption

AVAILABILITY

- Standard item
- Check availability


Material

Grade	● Continuous	● Slight interruption	✖ Interruption
CC2			
CX6			
CW1			
CX9			
CW1			
CC7			

K Cast iron**S** Heat-resistant alloys**H** Hard materials
SNGN


Square negative insert.

Reference	I	T	d	CX6	CX9	CC2	CC7	CW1
SNGN1204ENT	0.500	0.187	0.500	●				


SNGX


Square negative insert.

Reference	I	T	d	r	CX6	CX9	CC2	CC7	CW1
SNGX452	0.500	0.312	0.500	0.031	●				
SNGX453	0.500	0.312	0.500	0.047	●				
SNGX454	0.500	0.312	0.500	0.063	●				
SNGX552	0.625	0.312	0.625	0.031		○			
SNGX553	0.625	0.312	0.625	0.047	●	●			
SNGX554	0.625	0.312	0.625	0.063	●	●			


TNGA

Triangular negative insert.

Reference	I	T	d	r	CX6	CX9	CC2	CC7	CW1
TNGA331	0.650	0.187	0.375	0.016				●	
TNGA332	0.650	0.187	0.375	0.031			●		
TNGA333	0.650	0.187	0.375	0.047			●		
TNGA334	0.650	0.187	0.375	0.063		○			


TNGN

Triangular negative insert.

Reference	I	T	d	r	CX6	CX9	CC2	CC7	CW1
TNGN332	0.650	0.187	0.375	0.031		●			
TNGN333	0.650	0.187	0.375	0.047		●			
TNGN334	0.650	0.187	0.375	0.063		●			
TNGN352	0.650	0.312	0.375	0.031			●		
TNGN353	0.650	0.312	0.375	0.047		○			



Ceramic inserts

USE CLASSIFICATION

- Continuous
- Slight interruption
- ❖ Interruption

AVAILABILITY

- Standard item
- Check availability


Material

K Cast iron

S Heat-resistant alloys

H Hard materials

Grade	Continuous	Slight interruption	Interruption
CC2			
CX6			
CW1			
CX9			
CW1			
CC7			




VNGA

Reference

35° rhombic negative insert.

Reference	I	T	d	r	CX6	CX9	CC2	CC7	CW1
VNGA331	0.650	0.187	0.375	0.016					
VNGA332	0.650	0.187	0.375	0.031					
VNGA333	0.650	0.187	0.375	0.047					



WNKA

Reference

80° trigon negative insert.

Reference	I	T	d	r	CX6	CX9	CC2	CC7	CW1
WNKA432	0.320	0.187	0.500	0.031	●				
WNKA433	0.320	0.187	0.500	0.047	●	●	●	●	



CBN/PCD Inserts

i USE CLASSIFICATION

- Continuous
- Slight interruption
- ✖ Interruption

i AVAILABILITY

- Standard item
- Check availability

Material
Grade


Continuous



Slight interruption



Interruption

K


Cast iron

CBN**H**

Hard materials

CBN**N**

Non ferrous materials

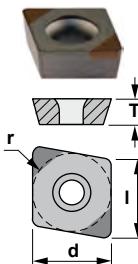PCD
CCMW

80° rhombic positive insert.

Reference
I**T****d****r**

CCMW21.50

0.255 0.094 0.250 0.008

CCMW21.51


0.255 0.094 0.250 0.016

CCMW32.51

0.381 0.156 0.375 0.016

CCMW32.52

0.381 0.156 0.375 0.031

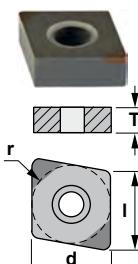CBN**PCD**
CNGA

80° rhombic negative insert.

Reference
I**T****d****r**

CNGA431


0.508 0.187 0.500 0.016

CNGA432

0.508 0.187 0.500 0.031

CNGA433

0.508 0.187 0.500 0.047

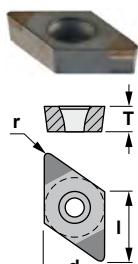CBN**PCD**
DCMW

55° rhombic positive insert.

Reference
I**T****d****r**

DCMW21.50

0.307 0.094 0.250 0.008

DCMW21.51

0.307 0.094 0.250 0.016

DCMW32.50


0.457 0.156 0.375 0.008

DCMW32.51

0.457 0.156 0.375 0.016

DCMW32.52

0.457 0.156 0.375 0.031

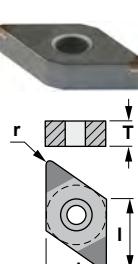CBN**PCD**
DNGA

55° rhombic negative insert.

Reference
I**T****d****r**

DNGA431

0.610 0.187 0.500 0.016

DNGA432

0.610 0.187 0.500 0.031

DNGA433

0.610 0.187 0.500 0.047

CBN**PCD**



CBN/PCD Inserts

USE CLASSIFICATION

- Continuous
- Slight interruption
- ✖ Interruption

AVAILABILITY

- Standard item
- Check availability

Material

Grade • Continuous ● Slight interruption ✖ Interruption

K Cast iron


CBN

H Hard materials

CBN


N Non ferrous materials

PCD

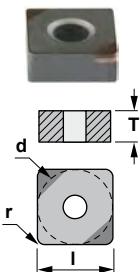


SNGA

Reference	I	T	d	r	CBN	PCD
SNGA431	0.500	0.187	0.500	0.016	○	
SNGA432	0.500	0.187	0.500	0.031	○	
SNGA433	0.500	0.187	0.500	0.047	○	

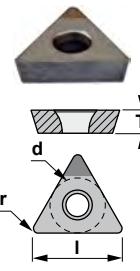


TCMW

Reference	I	T	d	r	CBN	PCD
TCMW21.51	0.433	0.094	0.250	0.016	●	
TCMW32.51	0.650	0.156	0.375	0.016	●	
TCMW32.52	0.650	0.156	0.375	0.031	●	

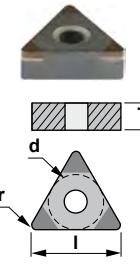

TNGA

Reference	I	T	d	r	CBN	PCD
TNGA331	0.650	0.187	0.375	0.016	●	
TNGA332	0.650	0.187	0.375	0.031	●	
TNGA333	0.650	0.187	0.375	0.047	○	



TPMN

Reference	I	T	d	r	CBN	PCD
TPMN221	0.433	0.125	0.250	0.016	●	
TPMN222	0.433	0.125	0.250	0.031	●	
TPMN321	0.650	0.125	0.375	0.016	●	
TPMN322	0.650	0.125	0.375	0.031	●	
TPMN323	0.650	0.125	0.375	0.047	●	



Improve your productivity

The Flow-Master coolant system works by delivering the machine coolant with maximum efficiency. The volume and speed of coolant coming out direct to the insert cutting edge improves machining performance.

Flow-Master tooling is extremely effective removing heat from the cutting edge, cooling the chips rapidly and helping to break it faster. Chips with poor heat removal are malleable and flexible, not breaking properly and adding extra heat to the cutting edge.

Performance improvement up to 50% with 70 bar pressure

■ Main Benefits

- Increased speeds and feeds
- Extended tool life
- Improved surface finish
- Better chip control and evacuation
- Easy system without spare parts