


# CANELA

## SET ADMT

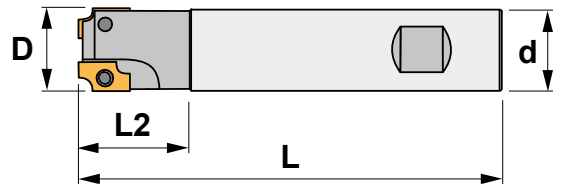

### 1235.07



2 Fresas cóncavas con 2 dientes + 18 plaquitas

| Referencia    |   | d  | D  | L   | L2 | rmin | rmax | Tamaño plaquita     |
|---------------|---|----|----|-----|----|------|------|---------------------|
| 1235.07.02201 | 2 | 20 | 22 | 120 | 35 | 1,0  | 2,5  | ADMT 1503R1.0 / 2.5 |
| 1235.07.02203 | 2 | 20 | 22 | 120 | 35 | 3,0  | 5,0  | ADMT 1503R3.0 / 5.0 |

### ADMT-R

Plaquitas con 15° incidencia

| Referencia    | l     | r   | s    | d    |
|---------------|-------|-----|------|------|
| ADMT 1503R1.0 | 15,00 | 1.0 | 3,18 | 9,52 |
| ADMT 1503R1.5 | 15,00 | 1.5 | 3,18 | 9,52 |
| ADMT 1503R2.0 | 15,00 | 2.0 | 3,18 | 9,52 |
| ADMT 1503R2.5 | 15,00 | 2.5 | 3,18 | 9,52 |
| ADMT 1503R3.0 | 15,00 | 3.0 | 3,18 | 9,52 |
| ADMT 1503R3.5 | 15,00 | 3.5 | 3,18 | 9,52 |
| ADMT 1503R4.0 | 15,00 | 4.0 | 3,18 | 9,52 |
| ADMT 1503R4.5 | 15,00 | 4.5 | 3,18 | 9,52 |
| ADMT 1503R5.0 | 15,00 | 5.0 | 3,18 | 9,52 |

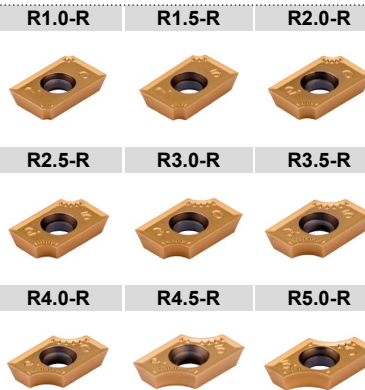

### TiN25

Composición recubrimiento



TiN-TiC-TiN

Calidad recubierta con TiN-TiC-TiN. El recubrimiento tiene un grosor de 3-5 micras para mecanizar acero, acero aleado y acero inoxidable, con o sin refrigerante.

Eines CANELA, S.L.

Pol. Ind. "Les Guixeres" · Torrent de Vallmajor 88 · 08915 Badalona · Catalunya · Espanya  
Tel. +34. 93 399 85 61 · www.canelatools.com