


SET E-SCLC

Features

- Better rigidity than steel bars.
- Excellent cutting performance in wide range of boring size even at vibration cutting condition.
- Longer tool life and excellent surface finish.
- Range starting at Ø 4 mm. and minimum bore diameter of 5 mm.

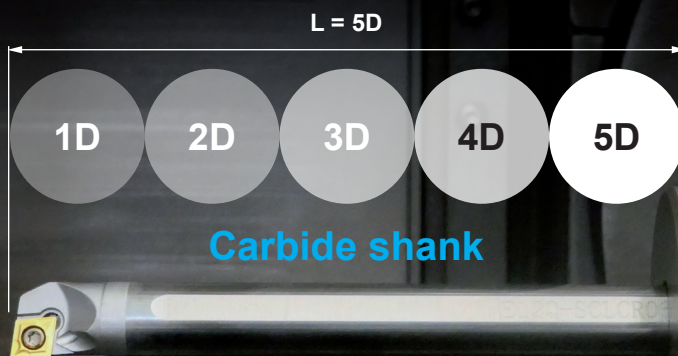

SET E-SCLC 95°

Reference	L1 Total length (mm)	Ø min. (mm)	Insert size	STANDARD PRICE	PROMO PRICE
E08K SCLCR/L 06	125	11	CC.. 0602..	524€	250€
E10M SCLCR/L 06	150	14	CC.. 0602..		
E12Q SCLCR/L 06	180	17	CC.. 0602..		

CC..

Positive 7° clearance - 80° rhombic inserts.

Reference	l	s	d	CCGT-AL	CCGT-AP	CCMT	CCMW
CC.. 0602..	6,45	2,38	6,35				