


CANELA

SET ADMT

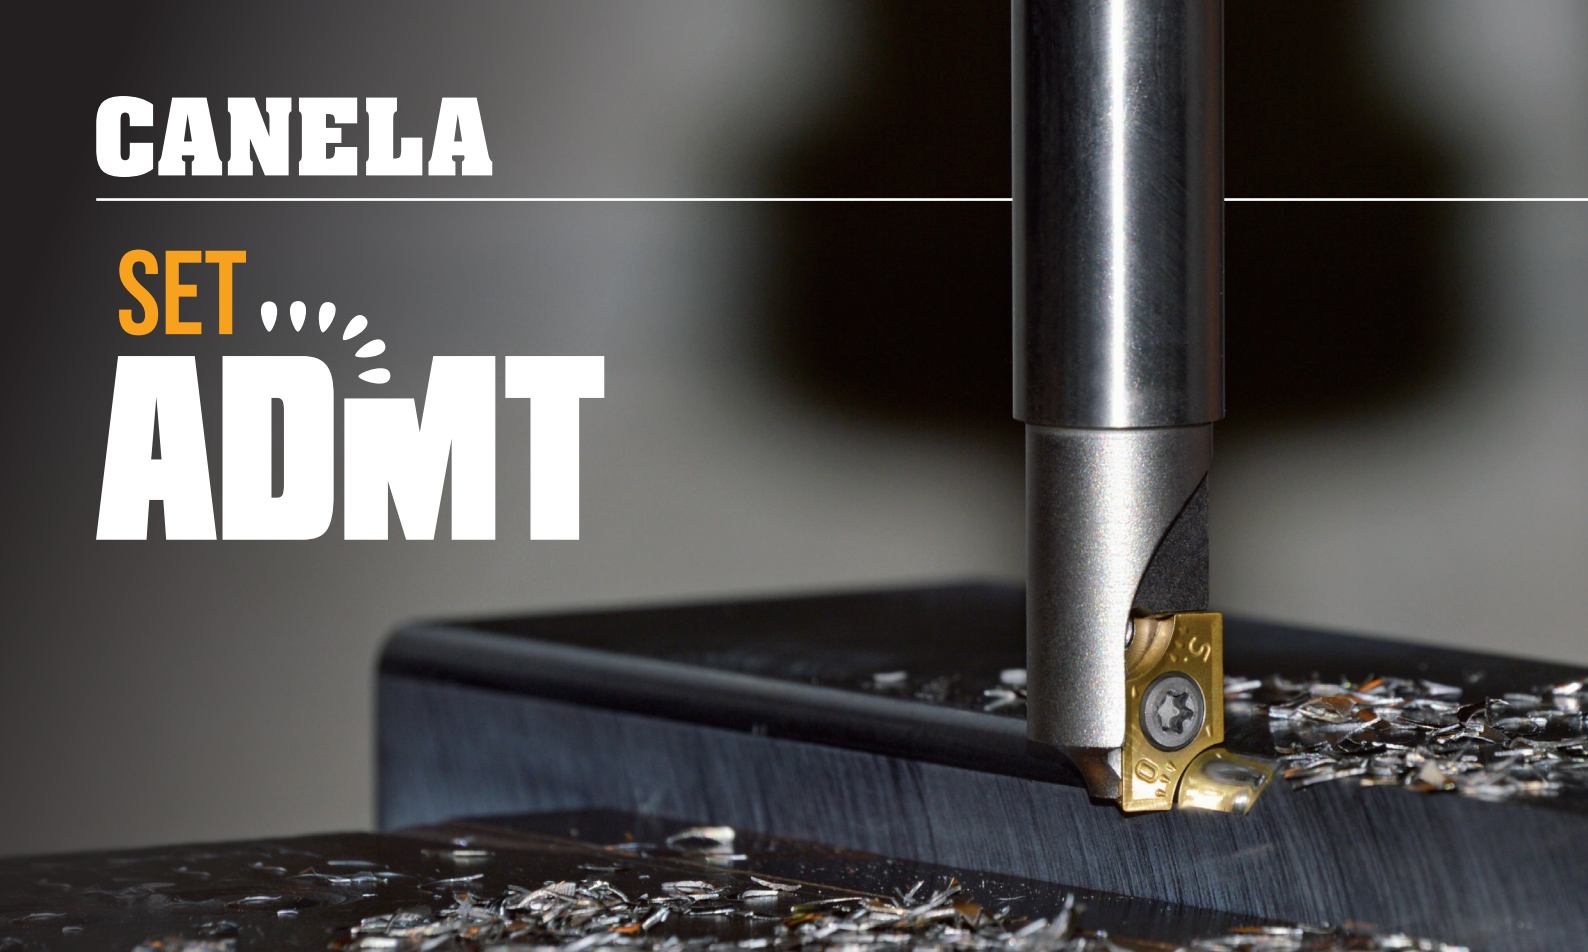

1235.01



2 pcs 1-tooth milling cutters with concave radius + 18 pcs inserts

Reference		d	D	L	L2	rmin	rmax	Insert size
1235.01.01701	1	16	17	120	30	1,0	2,5	ADMT 1503R1.0 / 2.5
1235.01.01703	1	16	17	120	30	3,0	5,0	ADMT 1503R3.0 / 5.0

ADMT-R

Inserts with 15° clearance

Reference	l	r	s	d
ADMT 1503R1.0	15,00	1.0	3,18	9,52
ADMT 1503R1.5	15,00	1.5	3,18	9,52
ADMT 1503R2.0	15,00	2.0	3,18	9,52
ADMT 1503R2.5	15,00	2.5	3,18	9,52
ADMT 1503R3.0	15,00	3.0	3,18	9,52
ADMT 1503R3.5	15,00	3.5	3,18	9,52
ADMT 1503R4.0	15,00	4.0	3,18	9,52
ADMT 1503R4.5	15,00	4.5	3,18	9,52
ADMT 1503R5.0	15,00	5.0	3,18	9,52

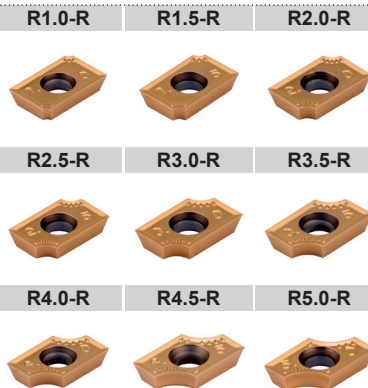

TiN25

Coating composition



TiN-TiC-TiN

Coated with TiN-TiC-TiN. The CVD coating has a thickness of 3-5 microns for use on steel, alloyed steel and stainless steel, with or without coolant.

Eines CANELA, S.L.

Pol. Ind. "Les Guixeres" · Torrent de Vallmajor 88 · 08915 Badalona · Catalunya · Espanya
Tel. +34. 93 399 85 61 · www.canelatools.com