
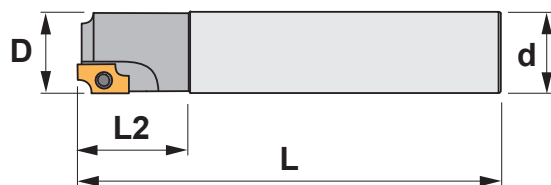


CANELA

SET ADMT

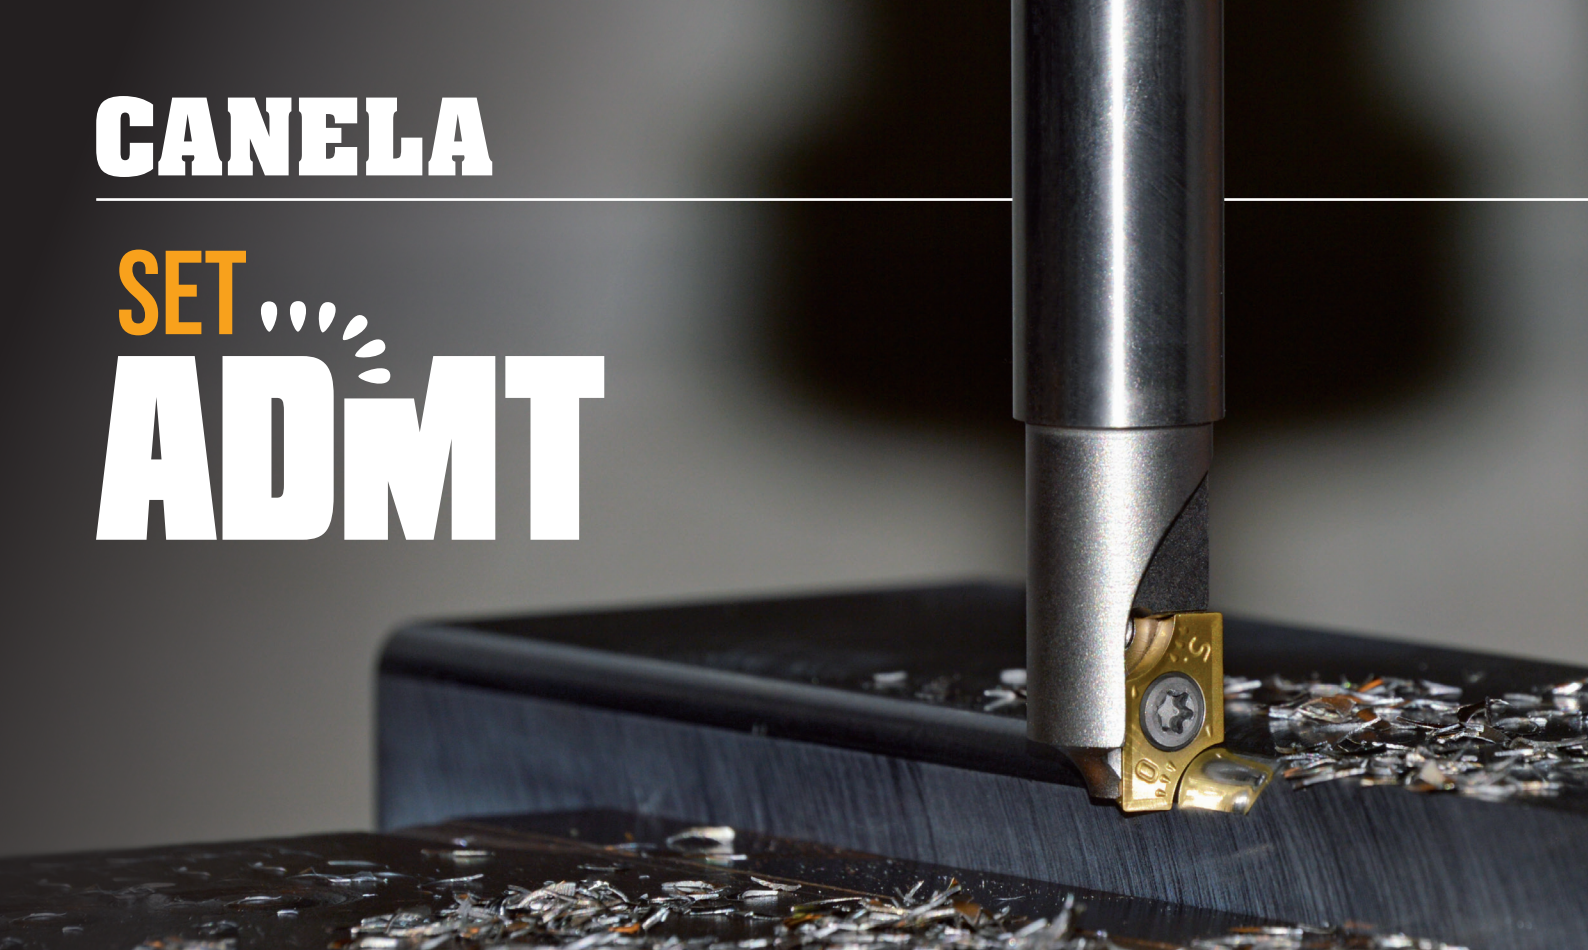

1235.01



2 fresas de 1 dente com raio côncavo + 18 pastilhas

Referência		d	D	L	L2	rmin	rmax	Medida pastilha
1235.01.01701	1	16	17	120	30	1,0	2,5	ADMT 1503R1.0 / 2.5
1235.01.01703	1	16	17	120	30	3,0	5,0	ADMT 1503R3.0 / 5.0

ADMT-R

Pastilhas com 15° incidência

Referência	l	r	s	d
ADMT 1503R1.0	15,00	1.0	3,18	9,52
ADMT 1503R1.5	15,00	1.5	3,18	9,52
ADMT 1503R2.0	15,00	2.0	3,18	9,52
ADMT 1503R2.5	15,00	2.5	3,18	9,52
ADMT 1503R3.0	15,00	3.0	3,18	9,52
ADMT 1503R3.5	15,00	3.5	3,18	9,52
ADMT 1503R4.0	15,00	4.0	3,18	9,52
ADMT 1503R4.5	15,00	4.5	3,18	9,52
ADMT 1503R5.0	15,00	5.0	3,18	9,52

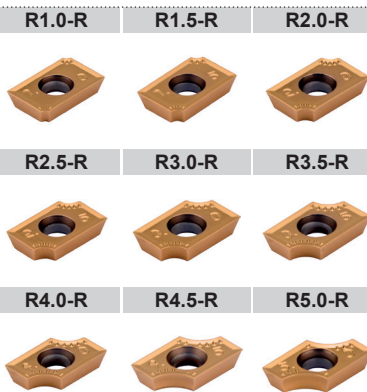

TIN25

Composição revestimento



TiN-TiC-TiN

Qualidade recoberta com TiN-TiC-TiN. Este recobrimto tem uma espessura de 3-5 microns para mecanizar aço, aço liga e aço inoxidável, com ou sem refrigeração. Com refrigeração a qualidade TiN25 é adequada para fresar titânio, ligas com base de níquel ou ferro dúctil.