



# CANELA DrillMill

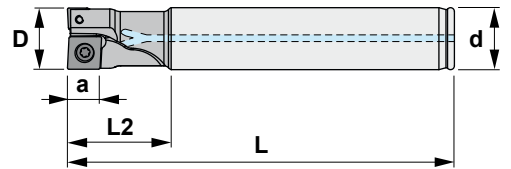

## 3324.00

Riferimento Referencia		D	d	L	L2	a	Dimensioni inserto Medida plaquita				
3324.00.016	2	16	16	100	25	5,0	XCMT 080304 / 060204	1430	5508	1222	5506
3324.00.020	2	20	20	125	32	7,0	XCMT 10T308 / 070304	1235	5515	1225	5507
3324.00.025	2	25	25	125	40	7,6	XCMT 130408 / 080304	1250	5520	1230	5508

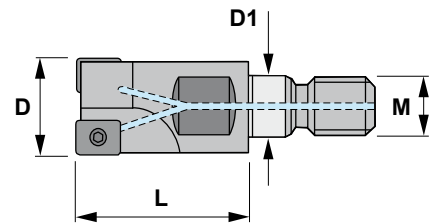


## 3324.06

Riferimento Referencia		D	L	M	D1	Dimensioni inserto Medida plaquita				
3324.06.016	2	16	23	M8	8,5	XCMT 080304 / 060204	1430	5508	1222	5506
3324.06.020	2	20	30	M10	10,5	XCMT 10T308 / 070304	1235	5515	1225	5507
3324.06.025	2	25	35	M12	12,5	XCMT 130408 / 080304	1250	5520	1230	5508

### XCMT

Inserti quadrati positivi con angolo di spoglia 7°.  
Plaquetas cuadradas positivas con 7° incidencia.

Riferimento / Referencia	l	s	d	r
XCMT 060204-MP EN	6,40	2,30	6,40	0,4
XCMT 070304-MP EN	7,50	3,18	7,50	0,4
XCMT 080304-MP EN	8,40	3,18	8,40	0,4
XCMT 10T308-MP EN	10,40	3,18	10,40	0,8
XCMT 130408-MP EN	13,34	4,70	13,34	0,8



### XCMT

