


CANELA

SET ADMT

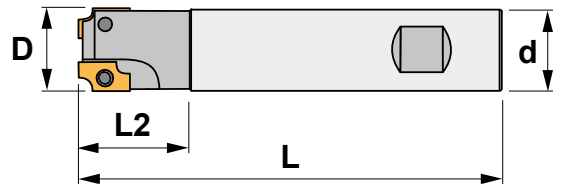

1235.07



2 Freses còncaves amb 2 dents + 18 plaquetes

Referència		d	D	L	L2	rmin	rmax	Mida plaqueta
1235.07.02201	2	20	22	120	35	1,0	2,5	ADMT 1503R1.0 / 2.5
1235.07.02203	2	20	22	120	35	3,0	5,0	ADMT 1503R3.0 / 5.0

ADMT-R

Plaquetes amb 15° incidència

Referència	l	r	s	d
ADMT 1503R1.0	15,00	1.0	3,18	9,52
ADMT 1503R1.5	15,00	1.5	3,18	9,52
ADMT 1503R2.0	15,00	2.0	3,18	9,52
ADMT 1503R2.5	15,00	2.5	3,18	9,52
ADMT 1503R3.0	15,00	3.0	3,18	9,52
ADMT 1503R3.5	15,00	3.5	3,18	9,52
ADMT 1503R4.0	15,00	4.0	3,18	9,52
ADMT 1503R4.5	15,00	4.5	3,18	9,52
ADMT 1503R5.0	15,00	5.0	3,18	9,52

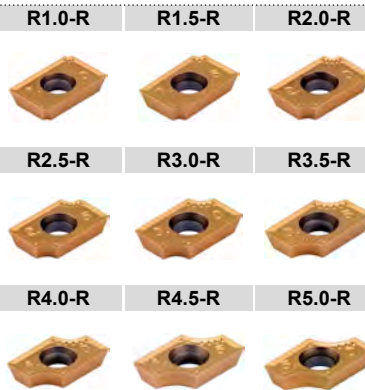

TiN25

Composició recobriments



TiN-TiC-TiN

Qualitat recoberta amb TiN-TiC-TiN. El recobriments té un gruix de 3-5 micres per mecanitzar acer, acer aliat i acer inoxidable, amb o sense refrigerant.